

# EXPANSION JOINTS



Parking Structures | Stadiums | Plaza Decks | Ramps | Bridges







## Ten things to consider when selecting an expansion joint system



### 1 Joint Size

Joint openings typically range from 1" (25 mm) to 24" (600 mm) depending upon movement criteria and other structural engineering considerations. Extremely wide openings of 48" (1200 mm) are not uncommon. Not all expansion joint designs can work with all joint opening sizes. Start with your project's service condition requirements.

### 2 Movement

Movement types include thermal, lateral shear, wind and seismic. Thermal movement expansion joints are typically designed for smaller openings and movement ranges up to +/- 50% of the nominal opening. Seismic expansion joints are generally designed for larger openings and multi-directional movement up to +/- 100% of nominal opening size.

### 3 Loading Requirements

All horizontal expansion joints will accommodate pedestrian traffic. Many systems are appropriate for heavy vehicular or light commercial loads, such as snow plows or fork trucks. For wide-span loadings in parking structures, plaza decks, bridges and stadiums, heavy-duty seismic systems are recommended.

## 4 Waterproof vs. Water-Resistant

Parking structures, plaza decks, open-air stadiums and the like all require expansion joint systems to be waterproof. Other applications may only require that cover systems be water-resistant or shed casual water. Know and specify the difference.

## 5 ADA Compliance

The Americans with Disabilities Act requires that no vertical offset exist without a tapered transition. Look for and specify ADA compliant expansion joint systems. ADA compliance may require that expansion joint systems meet specific elevation transition criteria.

## 6 Fire-Rating/Life-Safety

National and international building codes require fire-rated joint systems where adjacent floors and walls are rated. Test standards have changed to address pre-conditioning (cycling), smoke penetration and field splices. Specify fire barriers and expansion joint systems from a single source to insure code compliance.

## 7 Colors/Finishes/Aesthetics

MM Systems believes that expansion joint systems should be visually pleasing. Metal options include aluminum, stainless and brass. Rubber seals are available in 8 custom colors. As a licensed Kynar/Hylar applicator, MM can provide finishes on aluminum in virtually any color imaginable.



## 8 Service Environment

Service environment defines the type of occupancy or functions occurring in the structure. Expansion Joints in stadium concourse areas, for example, must not only accommodate pedestrian traffic, but also fork trucks, and hard-wheeled pallette jacks delivering supplies to concession stands.

## 9 Technical Support

Our design team approach means we are involved from concept to completion. Design, specification development, field condition evaluations, installation training and forensic investigation are just a few of the services that MM Systems has been providing since 1960.

## 10 A Total Range of Product Solutions

MM Systems offers a total range of high performance joint sealing systems that meet the rigorous demands of parking garages, stadiums and other open air structures. Whether engineering the largest seismic expansion joint ever built, or providing wind drift joints for 90-mph sandstorms in Dubai, MM can get the job done.



## 8 Epoxy Bonded Sealing System / EBS Series

Elastoprene® rubber seal epoxy bonded to structural concrete joint opening creating a waterproof system.

## 9 LokCrete Membrane System / LMS Series / LSS Series

Waterproof Elastoprene® membrane seal with impact absorbing LokCrete® elastomeric concrete header

## 10 Armored Strip Bolt-In Membrane System / ASB Series

Continuous Elastoprene® seal and stainless steel armored edge with impact absorbing LokCrete® elastomeric concrete header.

## 11 Split Slab Membrane System / SSM Series / SSC Series / SCG Series

Heavy-duty aluminum frame with continuous locking Elastoprene® seal for waterproof split-slab applications.

## 12 ElastoLok Membrane System / EMS Series / EMC Series

Metal reinforced rubber lock down panels with continuous Elastoprene® membrane seal. Bolt-In or Cast-In versions.

## 13 ElastoGreen Surface-Mount Membrane System / EGS Series

Continuous wing seal surface mounted to concrete deck secured with impact absorbing recycled rubber nosing pads creating a waterproof membrane system.

## 14 Waterproof Foam Rubber Sealing System / EIF Series / EIH Series / EIS Series / ERS Series

Self-expanding micro-cell foam rubber extruded or impregnated with an acrylic polymer sealing compound.

## 16 Self-Healing Seismic Seal Systems / SHS Series

Seismic self-healing seal with aluminum slide plate and seismic rotation assembly.

## 17 Polyurethane Premold T-Joint System / PPT Series

Factory molded polyurethane seal accommodates small movement expansion joints.

## 18 Flexible Gutter System / FGS Series

Flexible fabric-reinforced rubber gutter moisture collection system.

## 19 Elastoprene Compression Seals / ECS Series / VCS Series

Colored rubber multi-web seal profile accommodates expansion and compression.

## 20 Seismic Slide Plate System / SSP Series / STS Series / SSS Series / SNB Series

Heavy-duty metal slide plate system for wide joints with multi-directional movement.

## 22 Cast-In Seismic System / CIS Series / BIS Series

Cast-in-place and bolt-in place heavy-duty metal seismic system for post-tensioned concrete decks.

## 23 Surface Mount Seismic Cover System / SMS Series

Heavy-duty surface mounted seismic metal cover for wide joints without blockouts.

## 24 Hinged Safety Cover System / HSC Series

Aluminum cover with integral hinge to accommodate vertical offsets in concrete decks.

## 25 Rubber Safety Cover System / RSC Series

Dual hinged aluminum cover with impact absorbing rubber nosing pads that accommodates vertical offsets in concrete decks.

## 26 Impact Damping Systems / GID Series / AID Series

Galvanized or Aluminum cover epoxy anchored on one side with impact absorbing rubber base pads.

## 27 Vertical Seismic Sealing System / VSS Series

Vertical watertight seismic seal snap-locked into two aluminum frames.

## 28 ColorJoint Silicone System / ESS Series

Engineered silicone sealant factory bonded to a rectangular polyurethane backer support system.

## 29 ColorJoint Seismic Silicone & Impregnated Foam System / SIF Series

Silicone sealant factory applied to micro-cell foam impregnated with a waterproof polymer sealing compound.

## 30 Pyro-Flex Fire Barrier Systems / UPF Series / PF Series / BPF Series / FPB Series

Fire barrier systems with thermal, seismic and lateral shear capability.

## Product Feature Icons




**Fire Rated Available** icon represents availability of optional fire barriers listed with accredited laboratories.



**Waterproof System** icon represents availability of a 5-year watertight warranty through our Certified Contractor Network.



**Color Match Options** icon represents a choice between standard, custom or project specific color matching.



**Seismic Design** icon represents systems that accommodate multi-directional seismic movement.



**Heavy Duty System** icon represents heavy-duty load carrying capability for floors and vandal resistant wall systems.



**ADA Compliant** icon represents systems that comply with the Americans with Disabilities Act guideline.



**No-Bump System** icon represents expansion joints that provide flush, no-bump floor-to-floor transitions.



**Narrow Sight Line** icon represents expansion joints that provide a narrow and aesthetically pleasing sightline.



**Waterproof System** icon represents expansion joints that provide a watertight exterior seal.



|    | PARKING/EXTERIOR SYSTEM                       | SERIES                   | FEATURES   | NOMINAL<br>OPENING      | MOVEMENT<br>RANGE        | MOVEMENT<br>TYPE                | CODES / LOADING<br>TRAFFIC TYPE                                    | APPLICATIONS   |
|----|---|--------------------------|--|-------------------------|--------------------------|---------------------------------|--|--|
| 8  | <br>EPOXY BONDED SEALING SYSTEM               | EBS                      | <ul style="list-style-type: none"> <li>No blockouts required – waterproof sealing system becomes integral with concrete deck.</li> <li>Tenacious epoxy anchoring system bonds seal to concrete, aluminum and steel.</li> <li>Engineered to withstand heavy traffic loads and extreme weather conditions.</li> <li>Available with a 5-year warranty</li> </ul>  | 1" - 4"<br>25 - 102     | .5" - 6.25"<br>13 - 159  | <br>Seismic<br>Thermal<br>Shear | ADA<br>Pedestrian<br>Vehicular<br>Highway<br>Delivery<br>Snowplows | <ul style="list-style-type: none"> <li>Parking Deck Drive Lanes</li> <li>Traffic Speed &gt; 15mph</li> <li>Enplane/Deplane Road &amp; Bridge</li> <li>Auto Entrance Ramps</li> <li>Helix @ Turns &amp; Brake-overs</li> <li>Heavy Loads/Snowplows &amp; Buses</li> <li>Below Grade Areas &amp; Retaining Walls</li> </ul>  |
| 9  | <br>LOKCRETE MEMBRANE SYSTEMS                 | LMS<br>LSS               | <ul style="list-style-type: none"> <li>High performance monolithic waterproof expansion joint sealing system.</li> <li>Membrane seal with perforated wings bonded to deck with impact absorbing elastomeric concrete.</li> <li>Hard, elastic, abrasion resistant embed material that flexes with deck loads.</li> <li>Model LSS available for openings up to 10"</li> </ul>  | .75" - 4.5"<br>19 - 114 | .375" - 6.5"<br>10 - 165 | <br>Seismic<br>Thermal<br>Shear | ADA<br>Pedestrian<br>Vehicular                                     | <ul style="list-style-type: none"> <li>Parking Deck Drive Lanes</li> <li>Traffic Speed &lt; 15mph</li> <li>Helix &amp; Turning Lanes</li> <li>Concourse Areas</li> <li>Pedestrian Bridges</li> <li>High Volume Pedestrian Traffic</li> <li>Seismic Joints with Cover</li> </ul>  |
| 10 | <br>ARMORED STRIP BOLT-IN MEMBRANE SYSTEM     | ASB                      | <ul style="list-style-type: none"> <li>Heavy-duty aluminum frame with protective interlocking metal retaining angle.</li> <li>Replaceable locking Elastoprene seal with secondary fabric reinforced rubber gutter.</li> <li>Aluminum frame bolted to deck and bonded with impact absorbing elastomeric concrete.</li> <li>Hard, elastic, abrasion resistant embed material that flexes with deck loads.</li> </ul>                 | 1.5" - 4.5"<br>38 - 114 | .75" - 6.5"<br>19 - 165  | <br>Seismic<br>Thermal<br>Shear | ADA<br>Pedestrian<br>Vehicular<br>Delivery                         | <ul style="list-style-type: none"> <li>Parking Deck Drive Lanes</li> <li>Traffic Speed &lt; 25mph</li> <li>Turning Lanes</li> <li>Helix @ Turns &amp; Brake-overs</li> <li>Concourse Areas</li> <li>Pedestrian Bridges</li> <li>High Volume Pedestrian Traffic</li> </ul>  |
| 11 | <br>SPLIT SLAB MEMBRANE SYSTEMS               | SSM<br>SSC<br>SCG        | <ul style="list-style-type: none"> <li>Continuous locking Elastoprene® seal ties directly into deck waterproofing.</li> <li>Heavy-duty aluminum frame with protective interlocking metal retaining angle.</li> <li>Leg height adjusts to accommodate pavers, split-slabs and other topping surfaces.</li> <li>Available with a 5-year warranty.</li> </ul>   | 1.5" - 4.5"<br>38 - 114 | .75" - 6.5"<br>19 - 165  | <br>Seismic<br>Thermal<br>Shear | ADA<br>Pedestrian<br>Vehicular                                     | <ul style="list-style-type: none"> <li>Split Slab Waterproof Conditions</li> <li>Plaza Decks Paver Areas</li> <li>Traffic Speed &lt; 15mph</li> <li>High Volume Pedestrian Traffic</li> <li>Longitudinal Joints with Cover Plate</li> <li>Seismic Joints with Gutter &amp; Cover</li> </ul>  |
| 12 | <br>ELASTOLOK MEMBRANE SYSTEMS                | EMS<br>EMC               | <ul style="list-style-type: none"> <li>Metal reinforced rubber panels lock down continuous wing of Elastoprene® membrane seal.</li> <li>Slip resistant surface for severe applications and extreme weather conditions.</li> <li>Epoxy bolt-in and cast-in versions available.</li> <li>Seal profiles are ADA compliant.</li> </ul>   | .75" - 4.5"<br>19 - 114 | .75" - 6.5"<br>19 - 165  | <br>Seismic<br>Thermal<br>Shear | ADA<br>Pedestrian<br>Vehicular<br>Highway<br>Delivery<br>Snowplows | <ul style="list-style-type: none"> <li>Post tensioned concrete decks</li> <li>Parking Deck Drive Lanes</li> <li>Top Deck/Snowplow Areas</li> <li>Heavy Loads/Buses &amp; Delivery Vehicles</li> <li>Traffic Speed &gt; 15mph</li> <li>Helix &amp; Turning Lanes</li> <li>Enplane/Deplane Ramps Road &amp; Bridge</li> <li>Fork Trucks / Loading Docks</li> </ul> |
| 13 | <br>ELASTOGREEN SURFACE-MOUNT MEMBRANE SYSTEM | EGS                      | <ul style="list-style-type: none"> <li>First surface-mounted recycled rubber expansion joint in the industry.</li> <li>No blockouts required – waterproof sealing system becomes integral with concrete deck.</li> <li>Microsealant waterproof bedding technology insures a watertight seal to the concrete deck.</li> <li>ADA compliant surface mounted rubber nosing pads lock down continuous wing of membrane seal.</li> </ul> | .75" - 4.5"<br>19 - 114 | .75" - 6.5"<br>19 - 165  | <br>Seismic<br>Thermal<br>Shear | ADA<br>Pedestrian<br>Vehicular                                     | <ul style="list-style-type: none"> <li>Joint Openings with No Blockouts</li> <li>Parking Deck Drive Lanes</li> <li>Traffic Speed &lt; 15mph</li> <li>Helix &amp; Turning Lanes</li> <li>Concourse Areas</li> <li>Pedestrian Bridges</li> <li>High Volume Pedestrian Traffic</li> <li>Stair Tower &amp; Slab-to-Wall Conditions</li> </ul>                        |
| 14 | <br>WATERPROOF FOAM RUBBER SEALING SYSTEMS    | EIF<br>EIH<br>EIS<br>ERS | <ul style="list-style-type: none"> <li>Epoxy bonded impregnated foam systems provide additional point load support.</li> <li>Conforms to irregular openings virtually eliminating the risk of costly water damage.</li> <li>System generates constant external pressure providing a permanent weather-tight seal.</li> <li>Permanently elastic and will expand to accommodate the concrete deck movement.</li> </ul>               | .5" - 4.0"<br>13 - 102  | .25" - 6.0"<br>6 - 152   | <br>Seismic<br>Thermal<br>Shear | Horizontal<br>Vertical   | <ul style="list-style-type: none"> <li>Expands to Fill Irregular Openings</li> <li>Roadway &amp; Pedestrian Bridges</li> <li>Pre-cast Concrete Tilt-Up Walls</li> <li>Below Grade Waterproofing</li> <li>Seating Bowl Areas (Treads &amp; Risers)</li> <li>Stair Tower &amp; Slab-to-Wall Conditions</li> <li>Joint Openings with No Blockouts</li> </ul>        |


Dimensions shown in inches and millimeters.

|    | PARKING/EXTERIOR SYSTEM   | SERIES                   | FEATURES  | NOMINAL<br>OPENING     | MOVEMENT<br>RANGE         | MOVEMENT<br>TYPE   | CODES / LOADING<br>TRAFFIC TYPE                | APPLICATIONS   |
|----|---|--------------------------|---|------------------------|---------------------------|--|--|--|
| 16 | <br>SELF-HEALING SEISMIC SEAL SYSTEMS      | SHS                      | <ul style="list-style-type: none"> <li>Self-healing seals provide self-centering of attached seismic slide plate.</li> <li>Self-expanding foam seals conform to irregular concrete openings.</li> <li>AASHTO HS-20 load carrying capability for wide joints with multi-directional seismic movement.</li> <li>ADA compliant seismic plates available in various metals and styles.</li> </ul> | 4" - 18"<br>102 - 457  | 2" - 27"<br>51 - 686      | <br>Seismic<br>Thermal<br>Shear   | ADA<br>Pedestrian<br>Vehicular                 | <ul style="list-style-type: none"> <li>Arenas, Plaza Decks, Parking Structures</li> <li>Stadium Seating Bowl (Treads &amp; Risers)</li> <li>Heavy Loads</li> <li>Pedestrian Bridges</li> <li>Parking Deck Drive Lanes</li> <li>Concourse Areas</li> </ul>          |
| 17 | <br>POLYURETHANE PREMOLD T-JOINT SYSTEM    | PPT                      | <ul style="list-style-type: none"> <li>Factory molded seal provides flush ADA compliant surface.</li> <li>Zero recess design eliminates collection of dirt.</li> <li>Uniform thickness and flush surface.</li> <li>Slip resistant raised surface pattern.</li> <li>For small movement applications.</li> </ul>  | .75" - 3.0"<br>19 - 76 | .625" - 4.25"<br>16 - 108 | <br>Thermal                       | Horizontal<br>Vertical                         | <ul style="list-style-type: none"> <li>Sidewalk Areas</li> <li>Concourse Areas</li> <li>Pedestrian Bridges</li> <li>Elevator &amp; Stair Towers</li> </ul>   |
| 18 | <br>FLEXIBLE GUTTER SYSTEM                 | FGS                      | <ul style="list-style-type: none"> <li>Flexible gutter collects and moves water away from the expansion joint system.</li> <li>Rubber gutter is fabric reinforced to minimize material elongation.</li> <li>Cost-effective solution for remedial repair of leaking expansion joint systems.</li> <li>Installed in blockouts or underslab conditions.</li> </ul>                               | 2.5" - 20"<br>64 - 508 | 0" - 0"<br>0 - 0          | <br>Seismic<br>Thermal<br>Shear   | Used<br>Below<br>Expansion<br>Joint<br>Systems | <ul style="list-style-type: none"> <li>Primary Water Control</li> <li>Secondary Water Containment</li> <li>Cost Effective Waterproofing</li> <li>Areas Over Occupied Space</li> </ul>  |
| 19 | <br>ELASTOPRENE COMPRESSION SEAL SYSTEMS | ECS<br>VCS               | <ul style="list-style-type: none"> <li>Colored rubber multi-web seal profile accommodates expansion and compression.</li> <li>No mechanical anchors or metal components.</li> <li>Seal profiles are ADA compliant and provide a smooth transition for pedestrian traffic areas.</li> <li>Model ECS is for horizontal applications. Model VCS is for vertical applications.</li> </ul>         | 1.3" - 3.8"<br>33 - 97 | .9" - 5.75"<br>23 - 146   | <br>Thermal                     | Horizontal<br>Vertical                         | <ul style="list-style-type: none"> <li>Vertical Precast &amp; Perimeter Walls</li> <li>Color Matching of Wall Finishes</li> <li>Sidewalk Areas</li> <li>Concourse Areas</li> <li>Pedestrian Bridges</li> </ul>   |
| 20 | <br>SEISMIC SLIDE PLATE SYSTEMS          | SSP<br>STS<br>SSS<br>SNB | <ul style="list-style-type: none"> <li>Load rated heavy-duty metal slide plate with impact and sound dampener.</li> <li>Recessed extension plates allow smooth slab-to-slab transition. (Not Applicable on STS)</li> <li>Seismic centering device with dynamic load impact dampener and molded metal ends.</li> <li>Interlocking frame design insures proper alignment.</li> </ul>            | 4" - 12"<br>102 - 305  | 1" - 15"<br>25 - 381      | <br>Seismic<br>Thermal<br>Shear | ADA<br>Pedestrian<br>Vehicular                 | <ul style="list-style-type: none"> <li>Parking Deck Drive Lanes</li> <li>Traffic Speed &lt; 30mph</li> <li>Turning Lanes &amp; Entrance Ramps</li> <li>Heavy Loads</li> <li>Longitudinal Joints</li> <li>Pedestrian Bridges</li> </ul>                             |
| 22 | <br>CAST-IN SEISMIC SYSTEMS              | CIS<br>BIS               | <ul style="list-style-type: none"> <li>Cast-In design eliminates slab-to-slab vertical offsets and need for blockouts.</li> <li>High strength hook bolts adjust around cables in post-tension concrete decks.</li> <li>Seismic centering device with dynamic load impact dampener and molded metal ends.</li> <li>BIS series is a low profile bolt-in version.</li> </ul>                     | 4" - 12"<br>102 - 305  | 2.5" - 15"<br>64 - 381    | <br>Seismic<br>Thermal<br>Shear | ADA<br>Pedestrian<br>Vehicular<br>Delivery     | <ul style="list-style-type: none"> <li>Post Tension Concrete Decks</li> <li>Parking Deck Drive Lanes</li> <li>Turning Lanes &amp; Entrance Ramps</li> <li>Traffic Speed &lt; 30mph</li> <li>High Volume Pedestrian Traffic</li> <li>Longitudinal Joints</li> </ul> |
| 23 | <br>SURFACE MOUNT SEISMIC COVER SYSTEM   | SMS                      | <ul style="list-style-type: none"> <li>Surface mount design eliminates need for blockouts.</li> <li>Load rated heavy-duty aluminum slide plate with impact and sound dampener.</li> <li>Aluminum base member incorporates tire impact deflection design and integral rubber gutter.</li> <li>Seismic centering device with dynamic load impact dampener and molded metal ends.</li> </ul>     | 4" - 12"<br>102 - 305  | 2" - 15"<br>51 - 381      | <br>Seismic<br>Thermal<br>Shear | ADA<br>Pedestrian<br>Vehicular                 | <ul style="list-style-type: none"> <li>Parking Deck Drive Lanes</li> <li>Traffic Speed &lt; 15mph</li> <li>Turning Lanes &amp; Entrance Ramps</li> <li>Heavy Loads</li> <li>Helix</li> </ul>   |

Dimensions shown in inches and millimeters.



24



HINGED SAFETY COVER SYSTEM

HSC

- Load rated heavy-duty aluminum slide plate with impact and sound dampener.
- Hinge design accommodates vertical offsets in concrete decks.
- Integral fabric reinforced rubber waterproofing gutter.
- ADA compliant slip resistant raised pattern design.

NOMINAL  
OPENING

2" - 10"  
51 - 254

MOVEMENT  
RANGE

1" - 10"  
25 - 254

MOVEMENT  
TYPE


CODES / LOADING  
TRAFFIC TYPE

ADA  
Pedestrian  
Vehicular

APPLICATIONS

- Areas with Vertical Slab Offsets
- High Volume Pedestrian Areas
- Pedestrian Bridges
- Traffic Speed < 15mph
- Concourse Areas
- Sidewalk Areas

25



RUBBER SAFETY COVER SYSTEM

RSC

- Covers expansion joint recess and vertical offsets in concrete slab.
- Convex shaped aluminum cover with raised slip resistant pattern.
- ADA compliant rubber nosing pads with mechanical hinges.
- Integral slip resistant rubber safety strips.


2" - 4"  
51 - 102

0" - 7.5"  
0 - 191  
Vehicular  
0" - 8"  
0 - 203  
Pedestrian

ADA  
Pedestrian  
Vehicular

- Stadium Seating Bowl
- Low Speed Vehicular Traffic
- Areas with Vertical Slab Offsets
- High Volume Pedestrian Areas
- Pedestrian Bridges
- Traffic Speed < 15mph
- Concourse Areas
- Sidewalk Areas

26



IMPACT DAMPING SYSTEMS

GID  
AID

- Load rated heavy-duty steel or aluminum slide plate.
- Crowned cover design accommodates vertical offsets in concrete decks.
- EPDM rubber base pads absorb vehicular impact loads.
- Fabric reinforced rubber waterproofing gutter with optional drain tube assembly.

2" - 10"  
51 - 254

1" - 15"  
25 - 381

ADA  
Pedestrian  
Vehicular

- Parking Deck Drive Lanes
- Heavy Loads
- Traffic Speed < 15mph
- Pedestrian Bridges
- Concourse Areas
- Sidewalk Areas
- Helix

27



VERTICAL SEALING SYSTEM

VSS

- Seismic seal snap-locked into two aluminum frames.
- No visible aluminum or hardware.
- Visual seals are available in standard and custom colors.
- Resistant to UV, ozone, acid rain, most chemicals and extreme temperatures.

2" - 10"  
51 - 254

1.25" - 24"  
32 - 610


Vertical

- Seismic Vertical Joint Openings
- Vertical Precast & Perimeter Walls
- Vertical Openings with No Blockouts
- Color Matching of Wall Finishes
- Available with Secondary Water Seal

28



COLORJOINT ESS SERIES

ESS

- Preformed silicone strip bonded to a rectangular polyurethane backer creates a watertight sealing system.
- System conforms to irregular openings and is soundproof, dust-proof, water and air tight.
- Engineered 1/2" thick preformed silicone strip virtually eliminates possibility of punctures.
- Resistant to UV, ozone, and extreme temperatures.


.9" - 6.75"  
22 - 171

.5" - 10.5"  
13 - 267

Vertical  
Horizontal  
May Require  
Cover

- Color Matching of Wall Finishes
- Vertical Brick & Block Walls
- Vertical Precast & Perimeter Walls
- Abutments
- Stair Tower & Slab-to-Wall Conditions
- Vertical Joints with No Blockouts
- Irregular Expansion Joint Openings

29



COLORJOINT ESS SERIES

SIF

- Binary silicone seal and impregnated foam nearly eliminates possibility of punctures.
- Permanently elastic and will expand to the required joint movement.
- Watertight, dust-proof, airtight, soundproof seal resilient and flexible to -39°F.
- Seismic movement capability with near zero tensile stress at bond line.


.5" - 8"  
13 - 203

.25" - 12"  
6 - 305

Vertical  
Horizontal  
May Require  
Cover

- Color Matching of Wall Finishes
- Vertical Brick & Block Walls
- Vertical Precast & Perimeter Walls
- Abutments
- Stair Tower & Slab-to-Wall Conditions
- Vertical Joints with No Blockouts
- Irregular Expansion Joint Openings

30



PYRO-FLEX FIRE BARRIER SYSTEMS

UPF  
PF

- ASTM Test Standards E-119, E-1399 and E-1966.
- Additional Standards: UL 263, UL 2079, UBC 43-1, UBC 7-1, ANSI A2.1 and NFPA 251.
- Available in 2, 3, 4 and 5 hour ratings and cycle tested for Class II & III movement including lateral shear.
- Listed with UL, Omega Point Laboratories, California State Fire Marshal and ICBO Evaluation Service.

1" - 32"  
25 - 813

0" - 48"  
0 - 1219

Ratings:  
1 Hour  
2 Hour  
3 Hour  
4 Hour

- Horizontal Concrete Joint Openings
- Vertical Concrete Joint Openings
- Horizontal Gypboard Joint Openings
- Vertical Gypboard Joint Openings

Dimensions shown in inches and millimeters.



# MM<sup>®</sup> Epoxy Bonded Sealing System

## Performance Data

**Elastoprene<sup>®</sup> rubber seal epoxy bonded to structural concrete joint opening creating a waterproof system.**

- No blockouts required – waterproof sealing system becomes integral with concrete deck.
- Tenacious thixotropic epoxy anchoring system bonds seal to concrete.
- ADA compliant seal profile provides pedestrian friendly walking surface.
- Engineered to withstand heavy traffic loads, UV, ozone, acid rain, most chemicals and extreme temperatures.
- Capable of thermal, seismic, vertical and lateral shear movement.
- Accommodates complex miters and changes in direction.
- Available with 5-year warranty through Certified Contractor Network.

### Product Features




### Color Options



Elastoprene<sup>®</sup> Rubber Seal

- ADA Compliant
- Accommodates complex miters
- Rubber hinge points accommodate vertical deflection
- Narrow sight line

Chamfer Edge of Concrete Joint

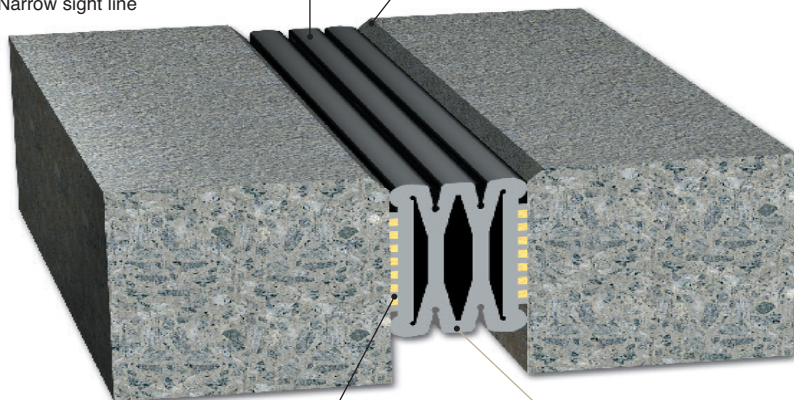

High Strength Epoxy Adhesive  
• 2 component  
• Vacuum compress for ease of installation



Vacuum Compress to Install

## Movement Table

| MODEL   | Total Movement |      | Joint Opening "A" |              |             | Seal Size |           | Installation Range "A" |       |     |
|---------|----------------|------|-------------------|--------------|-------------|-----------|-----------|------------------------|-------|-----|
|         | Min.           | Max. | Thermal Min.      | Thermal Max. | Safety Max. | Width "A" | Depth "B" | Min.                   | Max.  |     |
| EBS-100 | 1.25"          | 32   | 0.50"             | 13           | 1.50"       | 38        | 1.75"     | 44                     | 1.50" | 38  |
| EBS-150 | 1.75"          | 44   | 0.75"             | 19           | 2.00"       | 51        | 2.50"     | 64                     | 2.00" | 51  |
| EBS-200 | 1.75"          | 44   | 1.25"             | 32           | 2.50"       | 64        | 3.00"     | 76                     | 2.75" | 70  |
| EBS-250 | 2.625"         | 67   | 1.375"            | 35           | 3.50"       | 89        | 4.00"     | 102                    | 3.50" | 89  |
| EBS-300 | 3.50"          | 89   | 1.50"             | 38           | 4.50"       | 114       | 5.00"     | 127                    | 4.50" | 114 |
| EBS-400 | 4.50"          | 114  | 1.75"             | 44           | 5.50"       | 140       | 6.25"     | 159                    | 5.50" | 140 |


Dimension shown in **inches (bold)** and millimeters.

Width "A" is the seals' relaxed dimension.

Depth "B" is a fully compressed clearance dimension.


**Safety Max.** - Safety margin movement capacity accommodates concrete shrinkage, vertical deflection and unexpected movement.

Contact MM Systems for Below Grade Applications.



**Model EBS**


Slab-to-Slab / Movement .50" to 6.25"



**Model EBS**

Slab-to-Wall / Movement .50" to 6.25"

**NOTE:** Contact MM Systems for below grade applications.

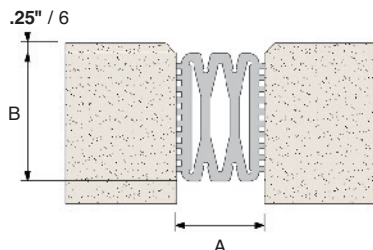

**Model EBS**



### PROJECTS

- 1 UNLV - Elevator Tower EBS Isolation Joint
- 2 Partners III, NC - EBS at breakover ramp entrance
- 3 Lincoln Parking Deck - Ideal for Ramps, Bridges, and Train Stations







# MM<sup>®</sup> LokCrete Membrane System

## Performance Data

### Waterproof Elastoprene<sup>®</sup> rubber membrane seal with impact absorbing LokCrete<sup>®</sup> elastomeric concrete header.

- High performance monolithic waterproof expansion joint sealing system.
- Capable of thermal, seismic, vertical and lateral shear movement.
- Membrane seal with perforated wings bonded to deck with impact absorbing elastomeric concrete.
- LokCrete<sup>®</sup> is a hard, elastic, abrasion resistant embed material that flexes with deck loads.
- No primers required – bonds directly to concrete.
- ADA compliant low profile seal design accommodates post tension cables and conduit.
- Resistant to UV, ozone, acid rain, most chemicals and extreme temperatures.
- Available with a 5-year warranty through Certified Contractor Network.

### Product Features



### Color Options






## Movement Table

| MODEL      | Total Movement   | Joint Opening "A" |                  |                  | Installation Range "A" |                  |  |
|------------|------------------|-------------------|------------------|------------------|------------------------|------------------|--|
|            |                  | Thermal Min.      | Thermal Max.     | Safety Max.      | Min.                   | Max.             |  |
| LMS-100    | <b>0.875"</b> 22 | <b>0.375"</b> 10  | <b>1.00"</b> 25  | <b>1.25"</b> 32  | <b>0.50"</b> 13        | <b>0.75"</b> 19  |  |
| LMS-150    | <b>1.25"</b> 32  | <b>0.50"</b> 13   | <b>1.50"</b> 38  | <b>1.75"</b> 44  | <b>0.75"</b> 19        | <b>1.25"</b> 32  |  |
| LMS-250    | <b>2.50"</b> 64  | <b>0.75"</b> 19   | <b>2.50"</b> 64  | <b>3.25"</b> 83  | <b>1.25"</b> 32        | <b>2.25"</b> 57  |  |
| LMS-350    | <b>3.25"</b> 83  | <b>1.00"</b> 25   | <b>3.50"</b> 89  | <b>4.25"</b> 108 | <b>1.50"</b> 38        | <b>3.25"</b> 83  |  |
| LMS-450 LP | <b>4.00"</b> 102 | <b>1.50"</b> 38   | <b>4.50"</b> 114 | <b>5.50"</b> 140 | <b>2.25"</b> 57        | <b>4.25"</b> 108 |  |
| LMS-450 HD | <b>4.00"</b> 102 | <b>1.50"</b> 38   | <b>4.50"</b> 114 | <b>5.50"</b> 140 | <b>2.25"</b> 57        | <b>4.25"</b> 108 |  |
| LMS-550 LP | <b>5.00"</b> 127 | <b>1.50"</b> 38   | <b>5.50"</b> 140 | <b>6.50"</b> 165 | <b>3.00"</b> 76        | <b>5.25"</b> 133 |  |
| LMS-550 HD | <b>5.00"</b> 127 | <b>1.50"</b> 38   | <b>5.50"</b> 140 | <b>6.50"</b> 165 | <b>3.00"</b> 76        | <b>5.25"</b> 133 |  |
| LSS-300    | <b>2.50"</b> 64  | <b>0.50"</b> 13   | <b>2.00"</b> 51  | <b>3.00"</b> 76  | <b>0.75"</b> 19        | <b>1.50"</b> 38  |  |
| LSS-400    | <b>3.50"</b> 89  | <b>0.75"</b> 19   | <b>3.00"</b> 76  | <b>4.25"</b> 108 | <b>1.00"</b> 25        | <b>2.00"</b> 51  |  |
| LSS-1600   | <b>14.0"</b> 356 | <b>2.00"</b> 51   | <b>10.0"</b> 254 | <b>16.0"</b> 406 | <b>2.75"</b> 70        | <b>8.0"</b> 203  |  |


Dimension shown in **inches (bold)** and millimeters.

Add "C" after the model number (eg. LMS-C-250) for slab-to-wall  
LP = low profile / HD = heavy duty

**Safety Max.** - Safety margin movement capacity accommodates concrete shrinkage, vertical deflection and unexpected movement.

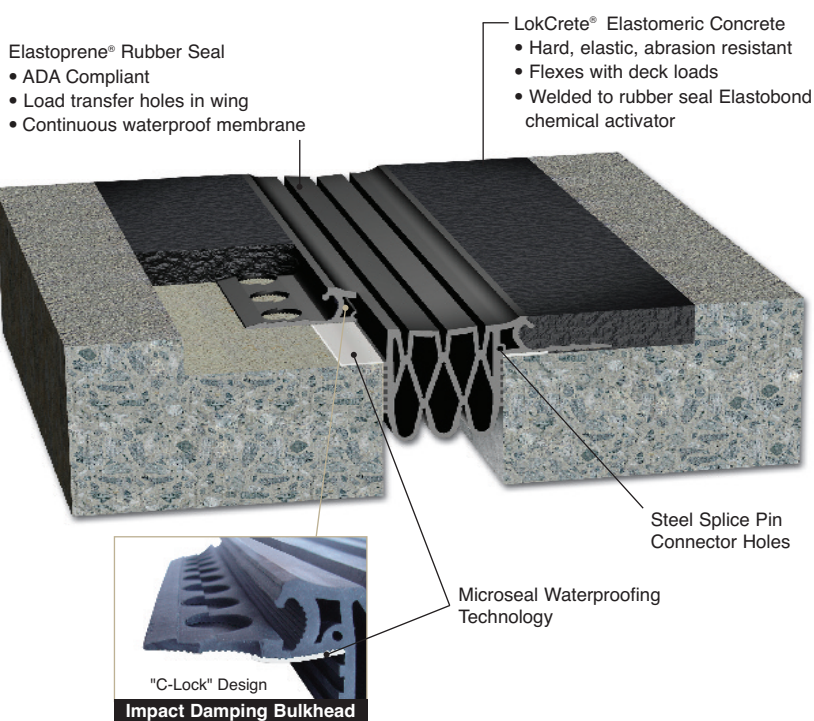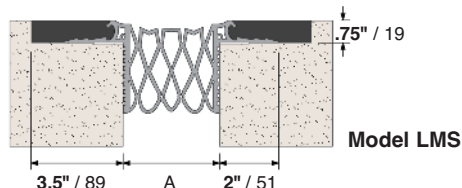

**Model LMS**  
Slab-to-Slab / Movement .375" to 6.5"

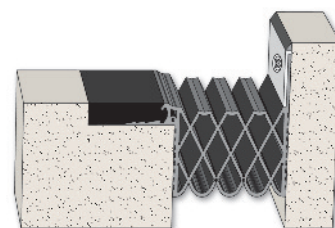

**Model LMS-C**  
Slab-to-Wall / Movement .375" to 6.5"



**Model LSS**  
Slab-to-Slab / Movement .50" to 16"  
(requires a cover plate - not shown)



**Model LSS-C**  
Slab-to-Wall / Movement .50" to 16"  
(requires a cover plate - not shown)



## PROJECTS

- 1 North Hills Mall, North Carolina
- 2 Bush International Airport - Helix Entrance
- 3 Georgia Aquarium - 1 million cars per year





# MM<sup>®</sup> Armored Strip Bolt-In Membrane System

## Performance Data


**Continuous Elastoprene<sup>®</sup> seal and stainless steel armored edge with impact absorbing LokCrete<sup>®</sup> elastomeric concrete header.**

- High performance monolithic waterproof expansion joint sealing system.
- Armored Stainless Steel retaining angle protects continuous Elastoprene seal.
- Heavy Duty aluminum frame bonded to deck with impact absorbing elastomeric concrete.
- LokCrete<sup>®</sup> is a hard, elastic, abrasion resistant embed material that flexes with deck loads.
- Capable of thermal, seismic, vertical and lateral shear movement.
- ADA compliant seal design provides pedestrian friendly walking surface.
- Resistant to UV, ozone, acid rain, most chemicals and extreme temperatures.
- A warranty may be available through Certified Contractor Network.

### Product Features



### Color Options

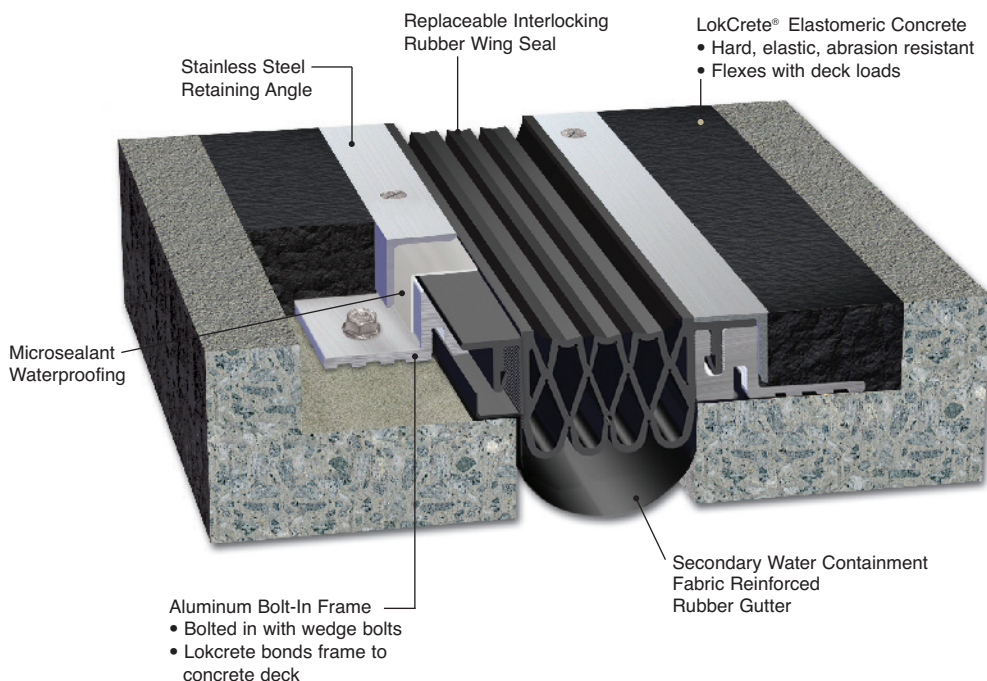


## Movement Table

| MODEL     | Total Movement | Joint Opening "A" |              |             | Installation Range "A" |           |
|-----------|----------------|-------------------|--------------|-------------|------------------------|-----------|
|           |                | Thermal Min.      | Thermal Max. | Safety Max. | Min.                   | Max.      |
| ASB-250   | 2.50" 64       | 0.75" 19          | 2.50" 64     | 3.25" 83    | 1.25" 32               | 2.25" 57  |
| ASB-350   | 3.25" 83       | 1.00" 25          | 3.50" 89     | 4.25" 108   | 1.50" 38               | 3.25" 83  |
| ASB-450   | 4.00" 102      | 1.50" 38          | 4.50" 114    | 5.50" 140   | 2.25" 57               | 4.25" 108 |
| ASB-550   | 5.00" 127      | 1.50" 38          | 5.50" 140    | 6.50" 165   | 3.00" 76               | 5.25" 133 |
| ASB-C-250 | 2.50" 64       | 0.75" 19          | 2.50" 64     | 3.25" 83    | 1.25" 32               | 2.25" 57  |
| ASB-C-350 | 3.25" 83       | 1.00" 25          | 3.50" 89     | 4.25" 108   | 1.50" 38               | 3.25" 83  |
| ASB-C-450 | 4.00" 102      | 1.50" 38          | 4.50" 114    | 5.50" 140   | 2.25" 57               | 4.25" 108 |
| ASB-C-550 | 5.00" 127      | 1.50" 38          | 5.50" 140    | 6.50" 165   | 3.00" 76               | 5.25" 133 |


Dimension shown in **inches (bold)** and millimeters.

**Safety Max** - Safety margin movement capacity accommodates concrete shrinkage, vertical deflection and unexpected movement.

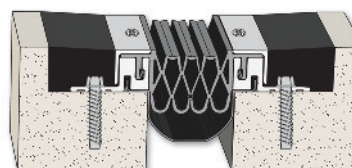


**Model ASB**

Slab-to-Slab / Movement .75" to 6.5"



**Model ASB-C**

Slab-to-Wall / Movement .75" to 6.5"

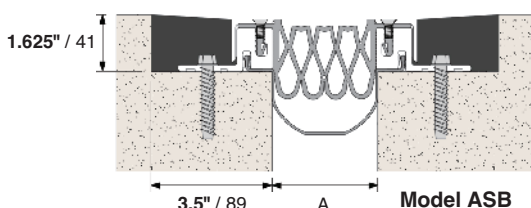

**Model ASB**



### PROJECTS

- 1 O'Hare Airport Garage - ASB Armored Frame installation
- 2 LokCrete placement
- 3 ASB completed installation







# MM<sup>®</sup> Split Slab Membrane System

## Performance Data

**Heavy-duty aluminum frame with continuous locking Elastoprene<sup>®</sup> seal for waterproof split-slab applications.**

- Continuous locking Elastoprene<sup>®</sup> seal ties directly into deck waterproofing.
- Heavy-duty aluminum frame with protective interlocking stainless steel retaining angle.
- Leg height adjusts to accommodate pavers, split-slabs and other topping surfaces.
- Capable of thermal, seismic, vertical and lateral shear movement.
- Exceptionally durable under vehicular traffic loads and extreme weather conditions.
- ADA compliant seal profile provides pedestrian friendly walking surface.
- Seal profile splices can be heat welded or adhesive bonded.
- Factory fabricated tee's, crosses and directional changes are available.
- A warranty may be available through Certified Contractor Network.

### Product Features



## Movement Table


| MODEL     | Total Movement | Joint Opening "A" |              |             | Installation Range "A" |           |  |
|-----------|----------------|-------------------|--------------|-------------|------------------------|-----------|--|
|           |                | Thermal Min.      | Thermal Max. | Safety Max. | Min.                   | Max.      |  |
| SSM-250   | 2.50" 64       | 0.75" 19          | 2.50" 64     | 3.25" 83    | 1.25" 32               | 2.25" 57  |  |
| SSM-350   | 3.25" 83       | 1.00" 25          | 3.50" 89     | 4.25" 108   | 1.50" 38               | 3.25" 83  |  |
| SSM-450   | 4.00" 102      | 1.50" 38          | 4.50" 114    | 5.50" 140   | 2.25" 57               | 4.25" 108 |  |
| SSM-550   | 5.00" 127      | 1.50" 38          | 5.50" 140    | 6.50" 165   | 3.00" 76               | 5.25" 225 |  |
| SSM-C-250 | 2.50" 64       | 0.75" 19          | 2.50" 64     | 3.25" 83    | 1.25" 32               | 2.25" 57  |  |
| SSM-C-350 | 3.25" 83       | 1.00" 25          | 3.50" 89     | 4.25" 108   | 1.50" 38               | 3.25" 83  |  |
| SSM-C-450 | 4.00" 102      | 1.50" 38          | 4.50" 114    | 5.50" 140   | 2.25" 57               | 4.25" 108 |  |
| SSM-C-550 | 5.00" 127      | 1.50" 38          | 5.50" 140    | 6.50" 165   | 3.00" 76               | 5.25" 225 |  |

Dimension shown in **inches (bold)** and millimeters.



Contact MM Systems for SCG and SCF movement tables.  
SSC Series movement tables identical.

**Safety Max** - Safety margin movement capacity accommodates concrete shrinkage, vertical deflection and unexpected movement.


**Note:** "C" Dimension is 1.75"/44mm minimum and maximum varies per project design - please specify depth.

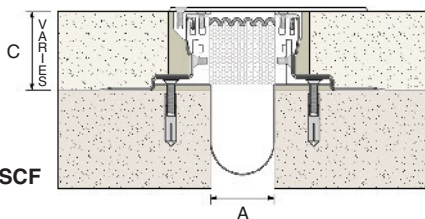


Model SCF

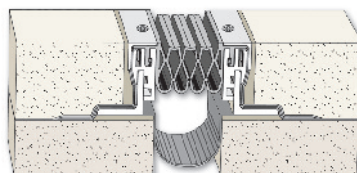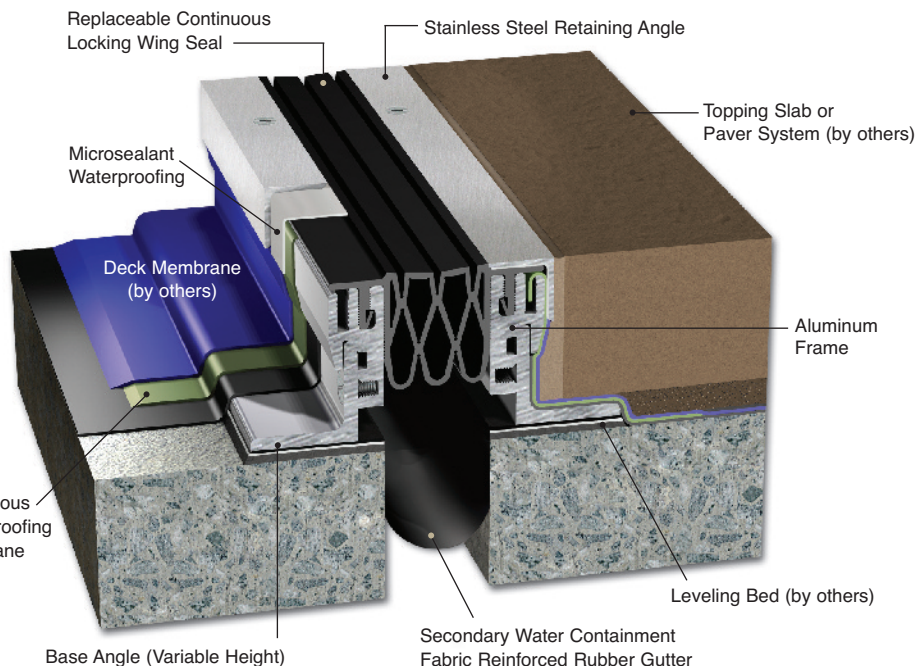


**Model SSM**  
Slab-to-Slab / Movement .75" to 6.5"



**Model SSM-C**  
Slab-to-Wall / Movement .75" to 6.5"

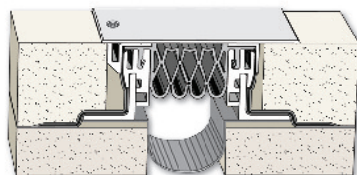

**Model SSC**  
Split Slab Membrane System with Cover Plate  
See web site for recessed cover version

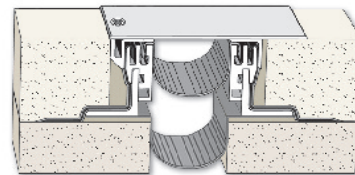


**Model SCG**  
Split Slab Membrane System with Fabric Reinforced Gutter and Cover Plate



### PROJECTS

- 1 Marriott Connecticut Convention Center
- 2 University of Massachusetts Plaza Deck
- 3 Salt River Project, Arizona Brass SSM System





# MM<sup>®</sup> ElastoLok Membrane Systems

## Performance Data

**Metal reinforced rubber lock down panels with continuous Elastoprene<sup>®</sup> rubber membrane seal.**

- Slip resistant surface for severe applications and extreme weather conditions.
- Metal reinforced rubber panels lock down continuous wing of Elastoprene<sup>®</sup> membrane seal.
- Specialty bedding compound insures a watertight seal to the concrete deck.
- Ultimate durability for loading docks, ramps, bridges, fork trucks, snow plows and buses.
- Seal profiles are ADA compliant and can be heat welded or adhesive bonded.
- A warranty may be available through Certified Contractor Network.
- **EMC:** Cast-In design eliminates the need to drill anchor holes in post tensioned concrete deck.

### Product Features




## Movement Table

| MODEL     | Total Movement | Joint Opening "A" |              |             | Installation Range "A" |           |
|-----------|----------------|-------------------|--------------|-------------|------------------------|-----------|
|           |                | Thermal Min.      | Thermal Max. | Safety Max. | Min.                   | Max.      |
| EMS-250   | 2.50" 64       | 0.75" 19          | 2.50" 64     | 3.25" 83    | 1.25" 32               | 2.25" 57  |
| EMS-350   | 3.25" 83       | 1.00" 25          | 3.50" 89     | 4.25" 108   | 1.50" 38               | 3.25" 83  |
| EMS-450   | 4.00" 102      | 1.50" 38          | 4.50" 114    | 5.50" 140   | 2.25" 57               | 4.25" 108 |
| EMS-550   | 5.00" 127      | 1.50" 38          | 5.50" 140    | 6.50" 165   | 3.00" 76               | 5.25" 133 |
| EMS-C-250 | 2.50" 64       | 0.75" 19          | 2.50" 64     | 3.25" 83    | 1.25" 32               | 2.25" 57  |
| EMS-C-350 | 3.25" 83       | 1.00" 25          | 3.50" 89     | 4.25" 108   | 1.50" 38               | 3.25" 83  |
| EMS-C-450 | 4.00" 102      | 1.50" 38          | 4.50" 114    | 5.50" 140   | 2.25" 57               | 4.25" 108 |
| EMS-C-550 | 5.00" 127      | 1.50" 38          | 5.50" 140    | 6.50" 165   | 3.00" 76               | 5.25" 133 |


Dimension shown in **inches** (bold) and millimeters.

**Safety Max** - Safety margin movement capacity accommodates concrete shrinkage, vertical deflection and unexpected movement.

**EMC Series** movement table identical.

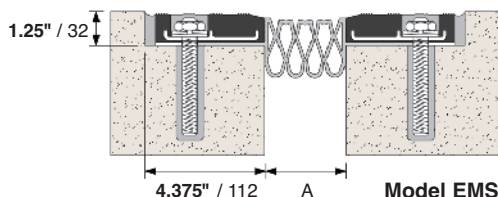


**Model EMS**

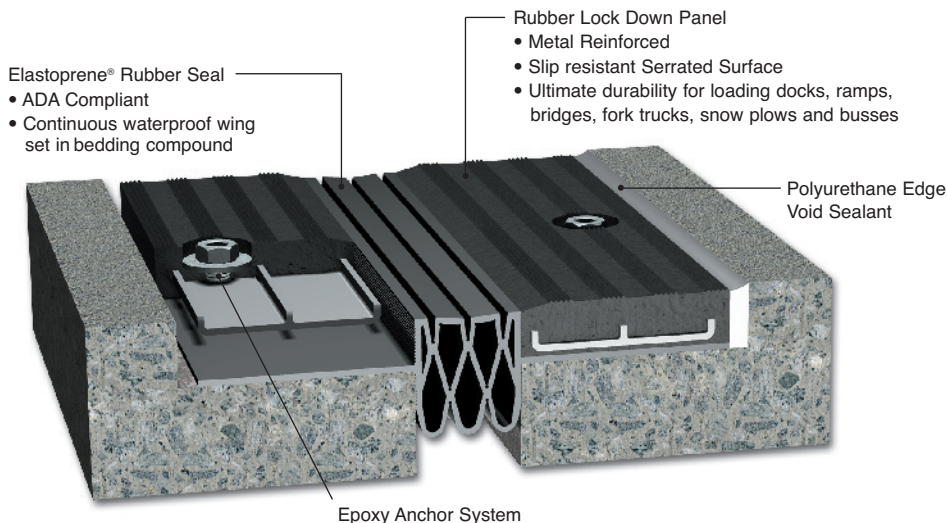

## EMS Series / Bolt-In / Recessed Blockout




**Model EMS / Bolt-In**  
Slab-to-Slab / Movement .75" to 6.5"




**Model EMS-C / Bolt-In**  
Slab-to-Wall / Movement .75" to 6.5"


## EMC Series / Cast-In / Post Tensioned Concrete

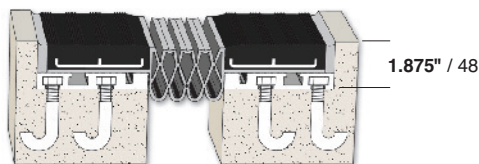

**Model EMC / Cast-In**  
Slab-to-Slab / Movement .75" to 6.5"

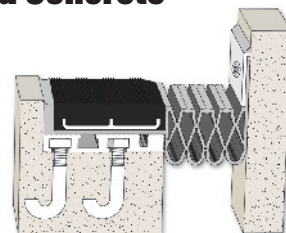

**Model EMC-C / Cast-In**  
Slab-to-Wall / Movement .75" to 6.5"

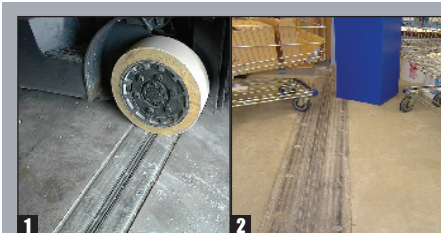


### PROJECTS

- 1 Severe Impact Loads - Hard Wheel Fork Trucks
- 2 Retail Applications - IKEA Store
- 3 Loading Dock Applications






## EMS Series - Parking Garage Application

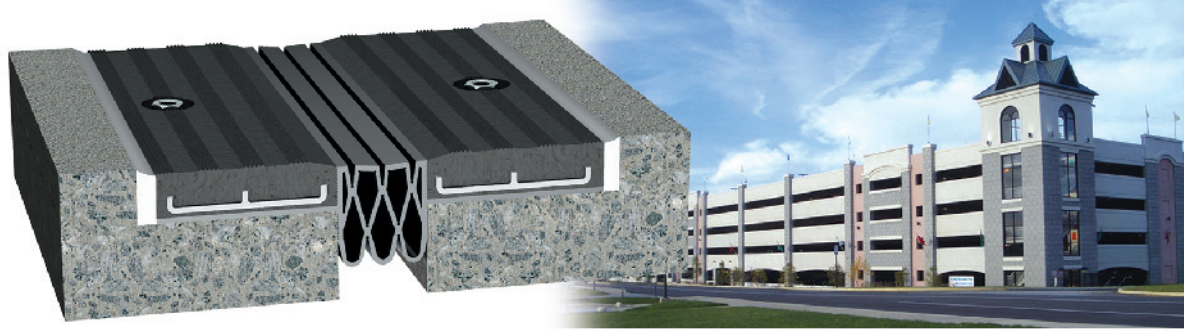

## EMC Series - Post Tension Parking Garage Application



## EMS Series - Retail / Hard Wheeled Cart Applications

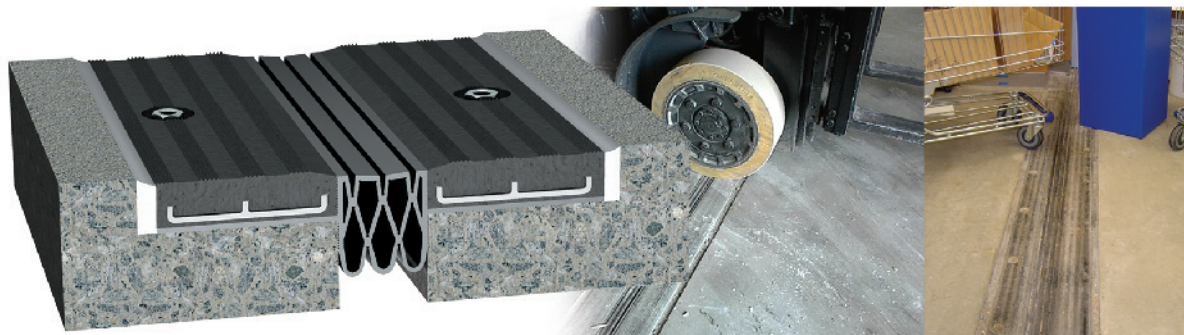




# MM<sup>®</sup> Waterproof Foam Rubber Sealing Systems

## Performance Data

Self-expanding microcell foam rubber extruded or impregnated with acrylic polymer sealing compound.

- Waterproof sealing systems not requiring blockouts.
- Epoxy bonded sidewalls provide additional point load support.
- Conforms to irregular openings minimizing the risk of costly water damage.
- System generates constant outward pressure providing a permanent weather tight seal.
- Permanently elastic and will expand and accommodate the concrete deck movement.
- Resistant to UV, ozone, acid rain, wind driven rain and extreme temperatures to -39°F.
- Provides watertight seal in below-grade applications when combined with specified waterproofing systems.

### Product Features



## Movement Table

| MODEL   | Total Movement |     | Movement Range "A" |         |           | Seal Depth "B" |       | Seal Piece Lengths<br>Feet Meters |     |
|---------|----------------|-----|--------------------|---------|-----------|----------------|-------|-----------------------------------|-----|
|         |                |     | Minimum            | Nominal | Maximum   |                |       |                                   |     |
| EIH-050 | 0.50"          | 13  | 0.250"             | 6       | 0.50" 13  | 0.75" 19       | 1.50" | 38.21'                            | 6.4 |
| EIH-063 | 0.63"          | 16  | 0.312"             | 8       | 0.63" 16  | 0.938" 24      | 1.50" | 38.45'                            | 4.4 |
| EIH-075 | 0.75"          | 19  | 0.375"             | 10      | 0.75" 19  | 1.125" 29      | 1.50" | 38.75'                            | 2.3 |
| EIH-100 | 1.00"          | 25  | 0.500"             | 13      | 1.00" 25  | 1.500" 38      | 2.00" | 51.75'                            | 2.3 |
| EIH-125 | 1.25"          | 32  | 0.625"             | 16      | 1.25" 32  | 1.875" 48      | 2.00" | 51.50'                            | 1.5 |
| EIH-150 | 1.50"          | 38  | 0.750"             | 19      | 1.50" 38  | 2.250" 57      | 2.00" | 51.50'                            | 1.5 |
| EIH-175 | 1.75"          | 44  | 0.875"             | 22      | 1.75" 44  | 2.625" 67      | 2.00" | 51.50'                            | 1.5 |
| EIH-200 | 2.00"          | 51  | 1.000"             | 25      | 2.00" 51  | 3.00" 76       | 3.00" | 76.50'                            | 1.5 |
| EIH-225 | 2.25"          | 57  | 1.125"             | 29      | 2.25" 57  | 3.375" 86      | 3.00" | 76.50'                            | 1.5 |
| EIH-250 | 2.50"          | 64  | 1.250"             | 32      | 2.50" 64  | 3.750" 95      | 3.00" | 76.50'                            | 1.5 |
| EIH-275 | 2.75"          | 70  | 1.375"             | 35      | 2.75" 70  | 4.150" 105     | 3.00" | 76.50'                            | 1.5 |
| EIH-300 | 3.00"          | 76  | 1.500"             | 38      | 3.00" 76  | 4.500" 114     | 3.00" | 76.50'                            | 1.5 |
| EIH-325 | 3.25"          | 83  | 1.562"             | 40      | 3.25" 83  | 4.812" 122     | 3.00" | 76.50'                            | 1.5 |
| EIH-350 | 3.50"          | 89  | 1.750"             | 44      | 3.50" 89  | 5.250" 133     | 3.00" | 76.50'                            | 1.5 |
| EIH-375 | 3.75"          | 96  | 1.875"             | 48      | 3.75" 96  | 5.625" 143     | 4.00" | 102.50'                           | 1.5 |
| EIH-400 | 4.00"          | 102 | 2.000"             | 51      | 4.00" 102 | 6.00" 152      | 4.00" | 102.50'                           | 1.5 |


Dimension shown in **inches (bold)** and millimeters.  
Larger sizes available. Call MM Systems for details.  
EIH, EIF & EIS Series movement tables identical.

| MODEL   | Total Movement |      | Joint Opening "A" |      | Installation Range "A" |      | Depth "B" |          |          |
|---------|----------------|------|-------------------|------|------------------------|------|-----------|----------|----------|
|         | Min.           | Max. | Min.              | Max. | Min.                   | Max. |           |          |          |
| ERS-100 | 0.75"          | 19   | 0.50"             | 13   | 1.25"                  | 32   | 0.75" 19  | 0.9" 23  | 1.50" 38 |
| ERS-150 | 1.50"          | 38   | 0.50"             | 13   | 2.00"                  | 51   | 1.13" 29  | 1.35" 34 | 2.13" 54 |
| ERS-200 | 1.75"          | 44   | 0.75"             | 19   | 2.50"                  | 64   | 1.50" 38  | 1.8" 46  | 2.75" 70 |
| ERS-250 | 2.25"          | 57   | 1.00"             | 25   | 3.25"                  | 83   | 1.88" 48  | 2.25" 57 | 3.38" 86 |

Dimension shown in **inches (bold)** and millimeters.  
Width "A" is the seals relaxed dimension and Depth "B" is when it is fully compressed.

## EIH Series - Expanding Impregnated Healer-Sealer Foam

Monolithic Self-Healing Synthetic Anti-Puncture Saturation Barrier

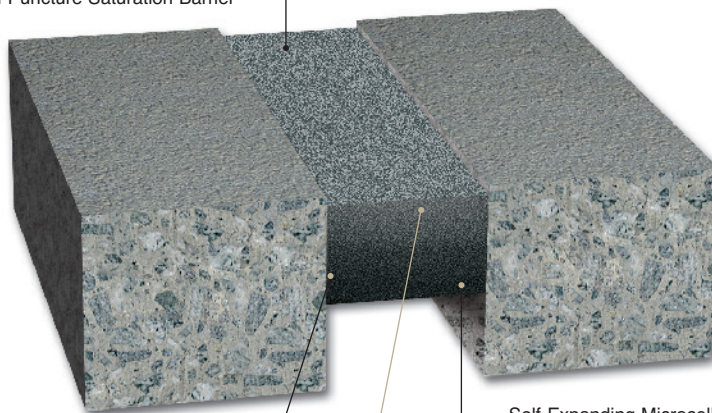

High Strength Epoxy Adhesive (each sidewall)

Self-Expanding Microcell Foam Impregnated with Acrylic Polymer

### Self-Healing & Sealing Technology



"We nailed it!"

Even nails can't cause leaks


Synthetic anti-puncture barrier provides self-healing and sealing protection

### Self-Expanding Foam Technology




Pre-compressed for shipment

After Self-Expansion




Model EIH

Slab-to-Slab / Movement .25" to 6.0"



Model EIH

Slab-to-Wall / Movement .25" to 6.0"



### Seismic Movement Capability


X-Axis - Expansion & Contraction

Y-Axis - Lateral Shear


Z-Axis - Vertical Displacement




## EIS Series - Expanding Impregnated Seismic Foam

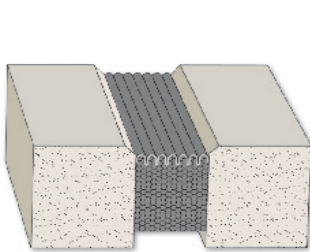


**Model EIS**  
Slab-to-Slab / Movement .25" to 6.0"

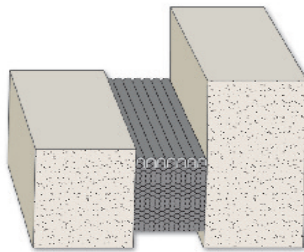


**Model EIS**  
Slab-to-Wall / Movement .25" to 6.0"

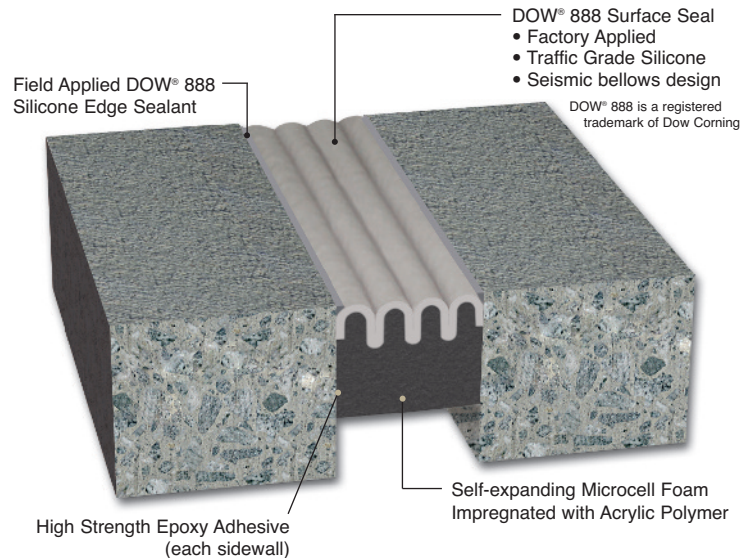

## EVA Series - ETHYLENE VINYL ACETATE FOAM

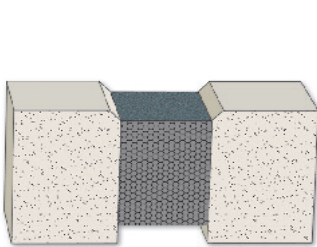


**Model EIF**  
Slab-to-Slab / Movement .25" to 6.0"

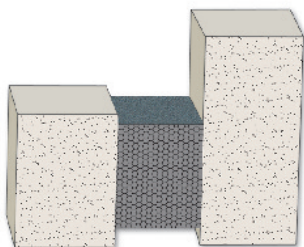


**Model EIF**  
Slab-to-Wall / Movement .25" to 6.0"


NOTE: Contact MM Systems for details of below grade and field applied silicone wearcourse applications.

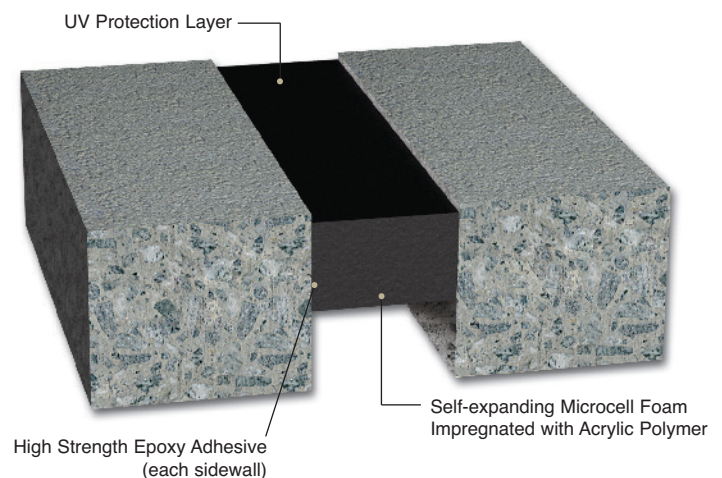


## ERS Series - Expanded Rubber Seal

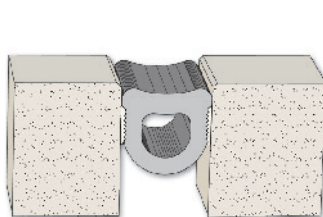

**Model ERS**  
Slab-to-Slab / Movement .5" to 3.75"  
(Cover Plate may be required - not shown)

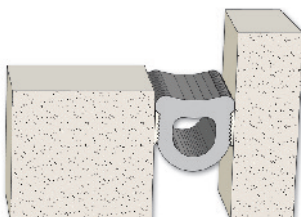

**Model ERS**  
Slab-to-Wall  
(Cover plate not required)

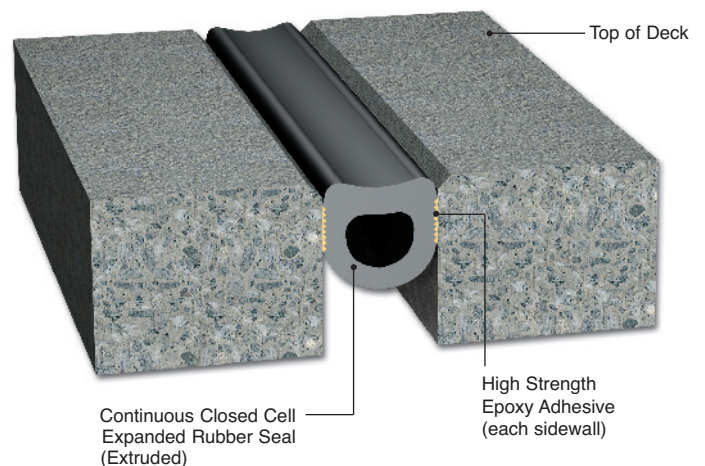





# MM<sup>®</sup> Self-Healing Seismic Seal Systems

## Performance Data

### Seismic Self-Healing Seal with aluminum slide plate and seismic rotation assembly.

- Watertight self-expanding acrylic impregnated foam conforms to irregular openings virtually eliminating the risk of costly water damage.
- Monolithic seal with dual impregnation process provides integral "self" healing and sealing capability.
- Seismic Rotation Dowel facilitates zero tensile stress at epoxy bond lines and provides multi-directional seismic movement capability.
- Seismic seals provide equidistant centering of seismic assembly and slide plate cover.
- AASHTO HS-20 load carrying capability.
- Complies with ADA guidelines.
- Slide plate assembly available in aluminum (standard), stainless steel, with impact/sound dampers or dual hinged nosing pads.


### Product Features



## Movement Table


| MODEL    | Total<br>Movement | Joint Opening "A" |            |              | Slide Plate<br>"B" | Slide Plate<br>Thicknes "C" |
|----------|-------------------|-------------------|------------|--------------|--------------------|-----------------------------|
|          |                   | Minimum           | Nominal    | Seismic Max. |                    |                             |
| SHS-400* | 4.00" 102         | 2.00" 51          | 4.00" 102  | 6.00" 152    | 8.00" 203          | 0.375" 10                   |
| SHS-500* | 5.00" 127         | 2.50" 64          | 5.00" 127  | 7.50" 191    | 11.00" 279         | 0.375" 10                   |
| SHS-600  | 6.00" 152         | 3.00" 76          | 6.00" 152  | 9.00" 229    | 11.00" 279         | 0.375" 10                   |
| SHS-700  | 7.00" 178         | 3.50" 89          | 7.00" 178  | 10.50" 267   | 14.00" 356         | 0.375" 10                   |
| SHS-800  | 8.00" 203         | 4.00" 102         | 8.00" 203  | 12.00" 305   | 14.00" 356         | 0.375" 10                   |
| SHS-900  | 9.00" 229         | 4.50" 114         | 9.00" 229  | 13.50" 343   | 17.00" 432         | 0.375" 10                   |
| SHS-1000 | 10.00" 254        | 5.00" 127         | 10.00" 254 | 15.00" 381   | 17.00" 432         | 0.375" 10                   |
| SHS-1100 | 11.00" 279        | 5.50" 140         | 11.00" 279 | 16.50" 419   | 20.00" 508         | 0.500" 13                   |
| SHS-1200 | 12.00" 305        | 6.00" 152         | 12.00" 305 | 18.00" 457   | 20.00" 508         | 0.500" 13                   |
| SHS-1300 | 13.00" 330        | 6.50" 165         | 13.00" 330 | 19.50" 495   | 21.50" 546         | 0.500" 13                   |
| SHS-1400 | 14.00" 356        | 7.00" 178         | 14.00" 356 | 21.00" 533   | 23.00" 584         | 0.500" 13                   |
| SHS-1500 | 15.00" 381        | 7.50" 191         | 15.00" 381 | 22.50" 572   | 24.50" 662         | 0.500" 13                   |
| SHS-1600 | 16.00" 406        | 8.00" 203         | 16.00" 406 | 24.00" 610   | 26.00" 660         | 0.500" 13                   |
| SHS-1700 | 17.00" 432        | 8.50" 216         | 17.00" 432 | 25.50" 648   | 27.50" 699         | 0.500" 13                   |
| SHS-1800 | 18.00" 457        | 9.00" 229         | 18.00" 457 | 27.00" 686   | 29.00" 737         | 0.500" 13                   |

Dimension shown in **inches (bold)** and millimeters.  
Thermal Maximum determined on a project basis.  
**SHD Series** movement table identical.  
When specifying slab-to-wall condition, add "C" after model number (eg. SHS-C-400).

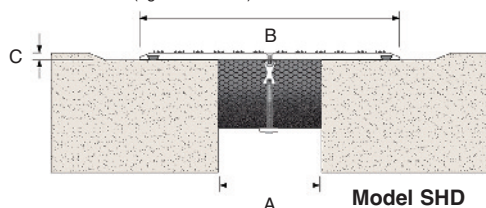


Model SHD

## SHS Series - Single Seal System


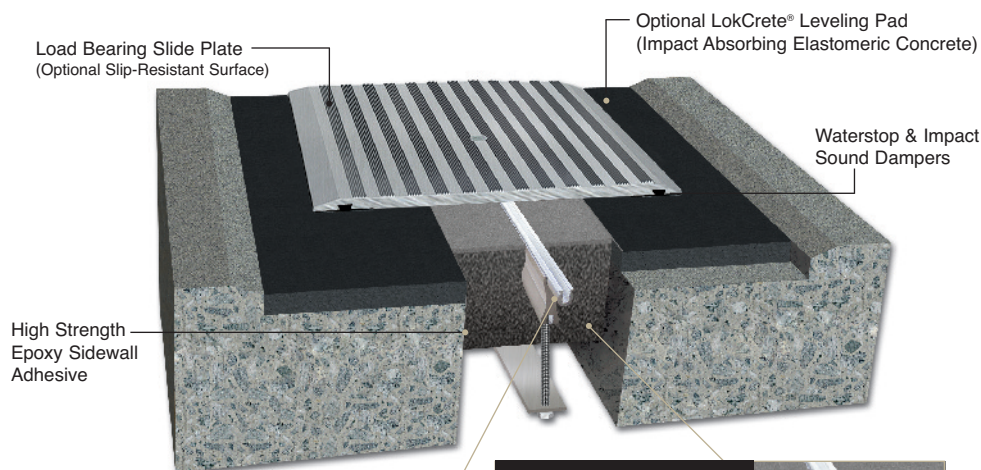


### Seismic Assembly

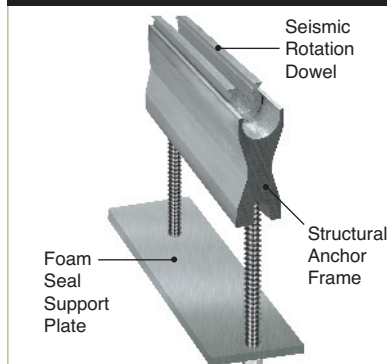


### Self-Healing Monolithic Seal

- Single Seal Design with factory molded-in Seismic Assembly
- Integral "Self" Healing & Sealing Technologies
- Synthetic Puncture Resistant Monolithic Protection Barrier
- Self-Expanding Acrylic Impregnated Micro-cell Foam
- High Strength Epoxy Sidewall Adhesive

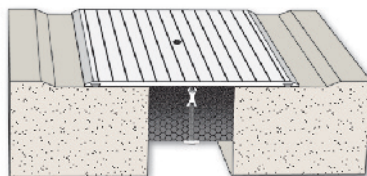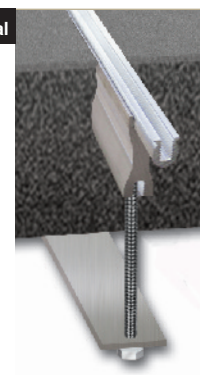


Model SHS  
Slab-to-Slab / Movement 2" to 27"

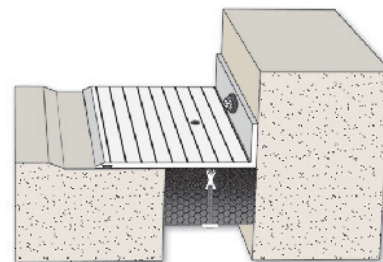

Model SHS-C  
Slab-to-Wall / Movement 2" to 27"

**NOTE:** Contact MM Systems for project specific slide plate designs.

## SHD Series - Dual Seal System

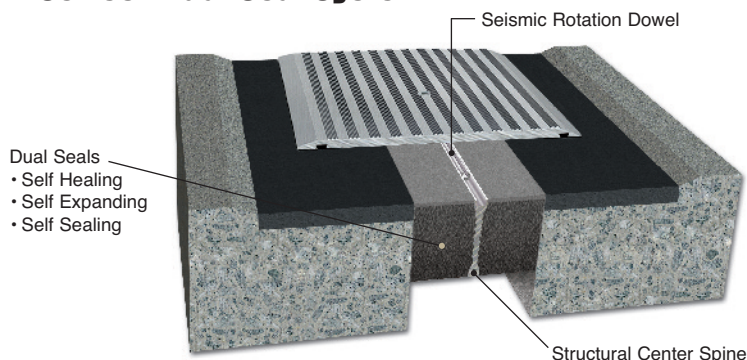





# MM<sup>®</sup> Polyurethane Premold T-Joint System

## Performance Data

**A factory cured polyurethane molded seal with a metal support plate designed for small movement expansion joints.**

- Molded Seal profiles are ADA compliant and designed with a slip resistant textured surface.
- PPT Nosing Sealant - two-part, chemical cure, cold-applied, non-sag, traffic grade elastomeric sealant.
- Uniform thickness and flush surface.
- Molded Seal has a Shore A Hardness of 30± 5 with medium firmness and abrasion resistance.
- Zero recess design eliminates the collection of dirt or debris.
- Can be easily repaired and rebonded.
- PPT System is available in standard color gray.




### Product Features




## Movement Table

| MODEL   | Total Movement | Joint Opening "A" |          |           | Installation Range "A" |          | Plate Size "B" | System Width "C" | Blockout Width "D" |
|---------|----------------|-------------------|----------|-----------|------------------------|----------|----------------|------------------|--------------------|
|         |                | Min.              | Mid.     | Max.      | Min.                   | Max.     |                |                  |                    |
| PPT-40  | 0.75" 19       | 0.625" 16         | 1.00" 25 | 1.375" 35 | 0.625" 16              | 1.00" 25 | 3.5" X .06"    | 4.0" 102         | 5.0" 127           |
| PPT-60  | 1.00" 25       | 1.00" 25          | 1.50" 38 | 2.00" 51  | 1.00" 25               | 1.50" 38 | 5.0" X .09"    | 6.0" 152         | 7.0" 178           |
| PPT-80  | 1.50" 38       | 1.50" 38          | 2.25" 57 | 3.00" 76  | 1.50" 38               | 2.25" 57 | 6.5" X .09"    | 8.0" 203         | 9.0" 229           |
| PPT-100 | 2.0" 51        | 2.00" 51          | 3.00" 76 | 4.00" 102 | 2.00" 51               | 3.00" 76 | 8.0" X .125"   | 10.0" 254        | 11.0" 279          |
| PPT-120 | 2.5" 64        | 2.25" 57          | 3.50" 89 | 4.75" 121 | 2.25" 57               | 3.50" 89 | 9.5" X .125"   | 12.0" 305        | 13.0" 330          |

Dimension shown in **inches (bold)** and millimeters.  
When specifying slab-to-wall condition, add "C" after the model number (eg. PPT-C-30)  
Aluminum Traffic Support Plate sold separately.  
Larger sizes available. Call MM Systems for details.

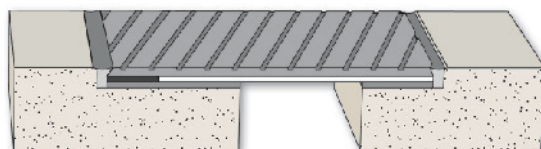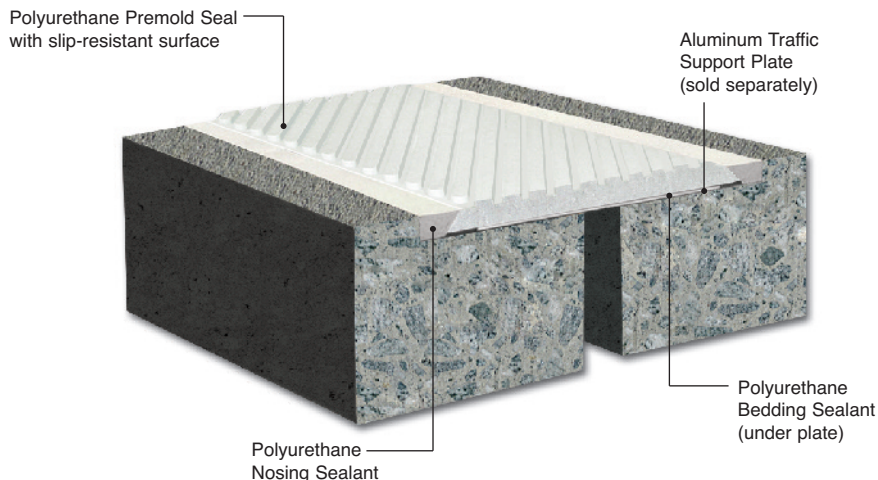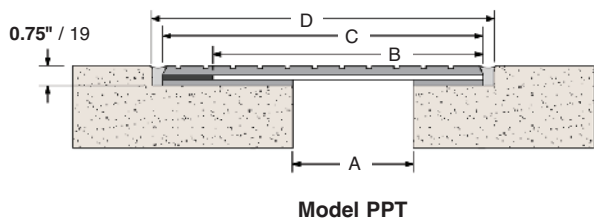

**Model PPT**  
Slab-to-Slab / Movement .625" to 4.25"

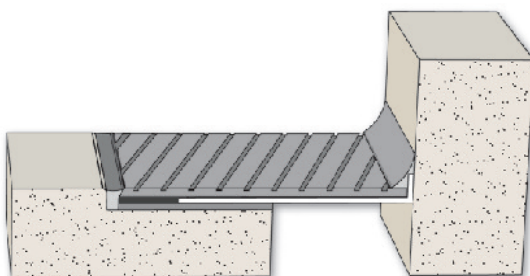


**Model PPT-C**  
Slab-to-Wall / Movement .625" to 4.25"



### PROJECTS

- 1 Extra-Wide Seismic Application - Petco Park
- 2 Tread & Riser Transitions - Stadium Seating Bowl
- 3 Washington Nationals Stadium

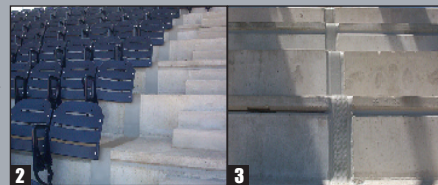




# MM<sup>®</sup> Flexible Gutter System

## Performance Data

**Flexible fabric-reinforced rubber gutter moisture collection system.**

- Collects and moves water away from the expansion joint system.
- Rubber gutter is fabric reinforced to minimize material elongation.
- $\pm 100\%$  movement capability.
- Cost-effective solution for remedial repair of leaking expansion joint systems.
- Installed in blockouts or underslab conditions.



### Product Features



## Movement Table

| MODEL  | Total Movement | Minimum | Joint Opening "A"<br>Nominal | Maximum     |
|--------|----------------|---------|------------------------------|-------------|
| FGS-12 | 5.0" 127       | 0.00" 0 | 2.50" 64                     | 5.00" 127   |
| FGS-18 | 11.00" 279     | 0.00" 0 | 5.50" 140                    | 11.00" 279  |
| FGS-24 | 17.00" 432     | 0.00" 0 | 8.50" 216                    | 17.00" 432  |
| FGS-30 | 23.00" 584     | 0.00" 0 | 11.50" 292                   | 23.00" 584  |
| FGS-36 | 29.00" 737     | 0.00" 0 | 14.50" 368                   | 29.00" 737  |
| FGS-42 | 35.00" 889     | 0.00" 0 | 17.50" 445                   | 35.00" 889  |
| FGS-48 | 41.00" 1041    | 0.00" 0 | 20.00" 508                   | 41.00" 1041 |

Dimension shown in **inches (bold)** and millimeters.

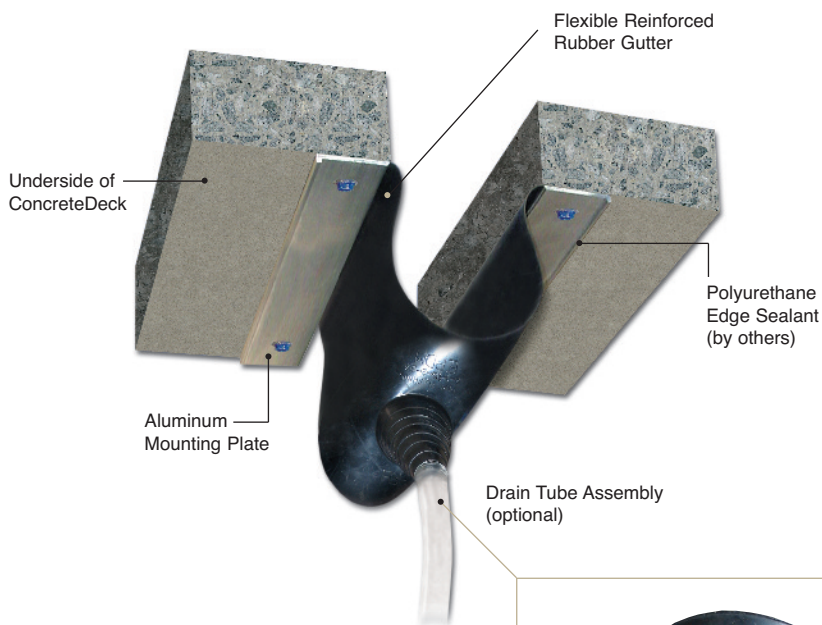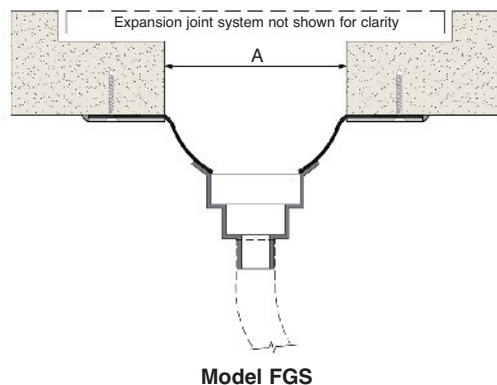

Optional drain tube assembly ties directly into the structure's drainage system.



**1**

**2**

**PROJECTS**

- 1 Fabric reinforced rubber strong enough to support a man.
- 2 FGS used in rehab projects to extend the service life of leaking expansion joints.
- 3 Fire Rated drain tube assemblies available when used with fire barriers.

**3**





# MM<sup>®</sup> Elastoprene Compression Seals

## Performance Data

**Colored rubber multi-web seal profile accommodates expansion and compression.**

- No mechanical anchors or metal components.
- Splices can be heat welded or bonded with specialty adhesive.
- Seal profiles are ADA compliant and provide a smooth transition for pedestrian traffic areas.
- Model ECS available in continuous lengths for horizontal applications.
- Model VCS is a colored rubber low pressure seal for vertical applications.
- High abrasion and ultraviolet resistance.
- Cost effective and easy to install.

### Product Features


### Color Options



## Movement Table

| MODEL   | Total Movement | Joint Opening "A"<br>Min. Max. | Installation Width<br>Min. Max. | Depth "B"<br>Clearance |
|---------|----------------|--------------------------------|---------------------------------|------------------------|
| ECS-200 | 0.87" 22       | 0.88" 22 1.75" 44              | 1.25" 32 1.75" 44               | 2.13" 54               |
| ECS-300 | 1.75" 44       | 1.00" 25 2.75" 70              | 1.75" 44 2.75" 70               | 2.38" 60               |
| ECS-400 | 2.63" 67       | 1.12" 28 3.75" 95              | 2.00" 51 3.75" 95               | 3.06" 78               |
| ECS-500 | 3.50" 89       | 1.25" 32 4.75" 121             | 2.25" 57 4.75" 121              | 3.75" 95               |
| ECS-600 | 4.25" 108      | 1.50" 38 5.75" 146             | 2.75" 70 5.75" 146              | 4.50" 114              |
| VCS-175 | 1.00" 25       | 0.50" 13 1.50" 38              | 0.63" 16 1.50" 38               | 1.25" 32               |
| VCS-225 | 1.37" 35       | 0.63" 16 2.00" 51              | 0.75" 19 2.00" 51               | 1.55" 39               |
| VCS-300 | 2.13" 54       | 0.63" 16 2.75" 70              | 0.75" 19 2.75" 70               | 2.25" 57               |



Dimension shown in **inches (bold)** and millimeters.

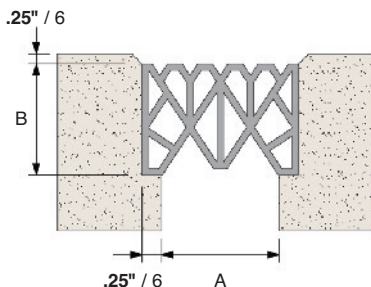


Model ECS

Elastoprene<sup>®</sup> Rubber Seal


- ADA Compliant
- Continuous seal with Color Options
- Model ECS for horizontal applications (shown below)

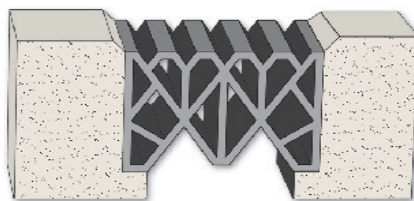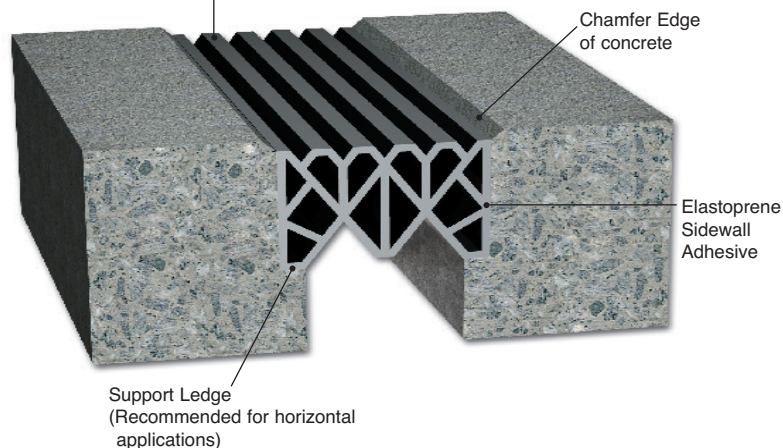

**Model ECS / Horizontal**  
Slab-to-Slab / Movement .88" to 5.75"  
(Heavy Duty)

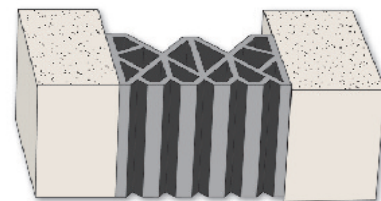

**Model ECS / Vertical**  
Wall-to-Wall / Movement .88" to 5.75"  
(Heavy Duty)

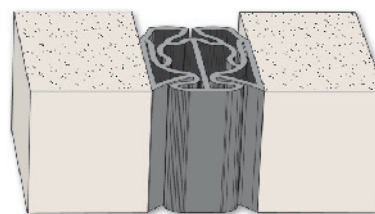

**Model VCS / Vertical**  
Wall-to-Wall / Movement .50" to 2.75"  
(Standard Duty)



### PROJECTS

- 1 ADA Compliant Entrance Way Application
- 2 Vertical Wall Application
- 3 St. Paul's Travelers Insurance Project



# MM<sup>®</sup> Seismic Slide Plate Systems

## Performance Data

**Heavy-duty metal slide plate system for wide joints with multi-directional movement.**

- Load rated heavy-duty metal slide plate with impact and sound damper.
- Interlocking frame design insures proper alignment.
- Slide plate available in stainless steel and aluminum.
- For wide joints with multi-directional seismic movement.
- Seismic centering device with dynamic load impact damper.
- Recessed extension plates allow smooth slab-to-slab transition.


### Product Features





## Movement Table

| MODEL      | Total Movement | Joint Opening "A" |           |           | Slide Plate "B" | Blockout "C" |
|------------|----------------|-------------------|-----------|-----------|-----------------|--------------|
|            |                | Minimum           | Nominal   | Maximum   |                 |              |
| SSP-400    | 5.0" 127       | 1.0" 25           | 4.0" 102  | 6.0" 152  | 8.0" 203        | 4.5" 114     |
| SSP-600    | 8.0" 203       | 1.0" 25           | 6.0" 152  | 9.0" 229  | 11.0" 279       | 5.5" 140     |
| SSP-800    | 11.0" 279      | 1.0" 25           | 8.0" 203  | 12.0" 305 | 14.0" 356       | 6.5" 165     |
| SSP-1000   | 14.0" 356      | 1.0" 25           | 10.0" 254 | 15.0" 381 | 17.0" 432       | 7.5" 191     |
| SSP-1200   | 17.0" 432      | 1.0" 25           | 12.0" 305 | 18.0" 458 | 20.0" 508       | 8.5" 216     |
| SSP-C-400  | 3.25" 83       | 1.75" 44          | 4.0" 102  | 5.0" 127  | 5.5" 140        | 4.5" 114     |
| SSP-C-600  | 5.75" 146      | 1.75" 44          | 6.0" 152  | 7.5" 191  | 8.0" 203        | 5.5" 140     |
| SSP-C-800  | 8.25" 210      | 1.75" 44          | 8.0" 203  | 10.0" 254 | 10.5" 267       | 6.5" 165     |
| SSP-C-1000 | 10.75" 273     | 1.75" 44          | 10.0" 254 | 12.5" 318 | 13.0" 330       | 7.5" 191     |
| SSP-C-1200 | 13.25" 337     | 1.75" 44          | 12.0" 305 | 15.0" 381 | 15.5" 394       | 8.5" 216     |


Dimension shown in **inches (bold)** and millimeters.  
Larger sizes available. Call MM Systems for details.  
SSS and STS Series movement tables identical.  
See web site for Model SNB Series dimensions.

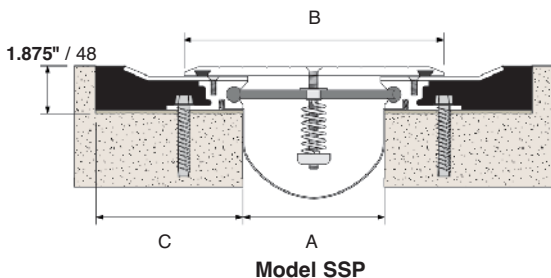


## SSP Series - Aluminum Seismic Slide Plate System

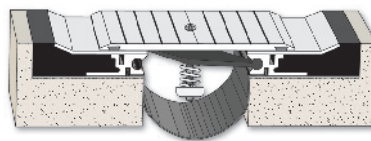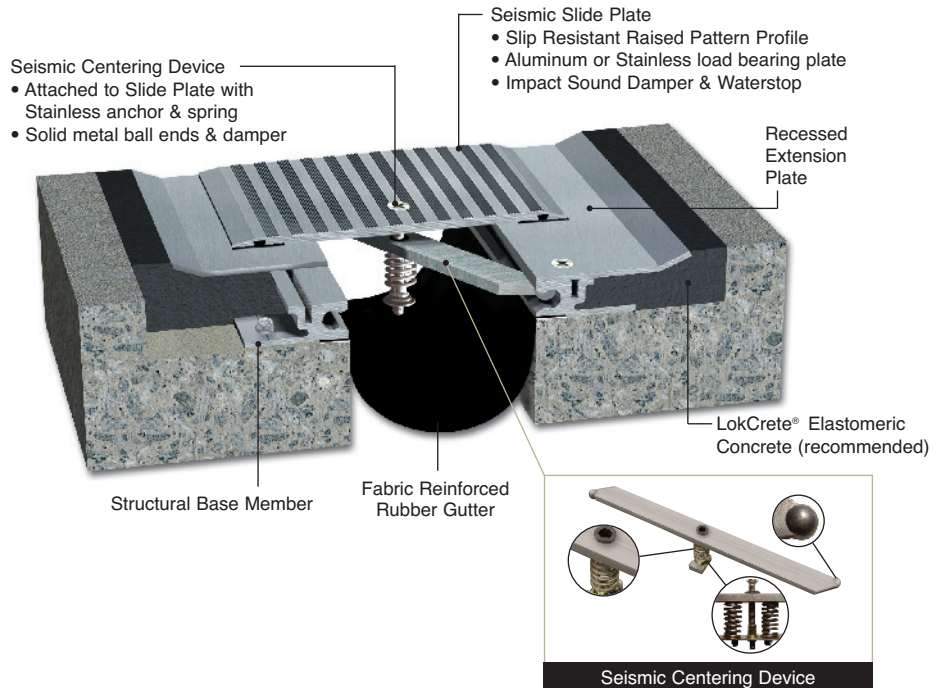

**Model SSP**  
Recessed/Slab-to-Slab  
Movement 1.0" to 18"

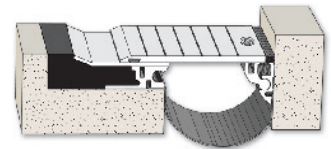

**Model SSP-C**  
Recessed/Slab-to-Wall  
Movement 1.75" to 15"




### Seismic Movement Capability


- X-Axis** - Expansion & Contraction
- Y-Axis** - Lateral Shear
- Z-Axis** - Vertical Displacement

### Seismic Displacement


Full Close



Nominal




Full Open







## SSS Series - Stainless Seismic Slide Plate System

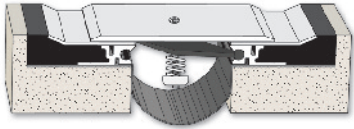


**Model SSS**  
Recessed/Slab-to-Slab  
Movement 1.0" to 18"

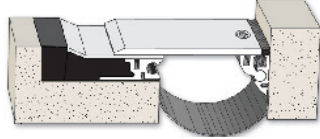


**Model SSS-C**  
Recessed/ Slab-to-Wall  
Movement 1.75" to 15"

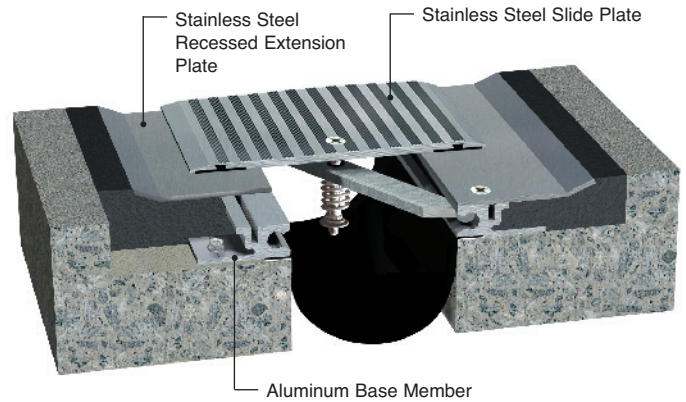


## STS Series - Seismic Top-Mount Slide Plate System




**Model STS**  
Top Mount/Slab-to-Slab  
Movement 1.0" to 18"




**Model STS-C**  
Top Mount/Slab-to-Wall  
Movement 1.75" to 15"

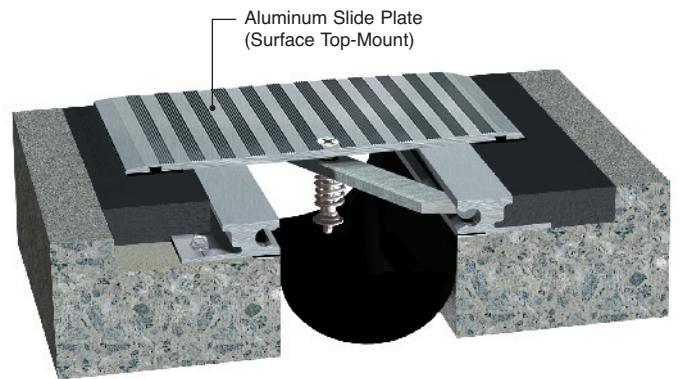


## SNB Series - Seismic No-Bump Slide Plate System

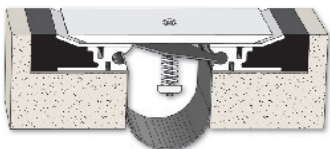

**Model SNB**  
Slab-to-Slab  
Thermal Movement  
Seismic Movement 18" Max.



**Model SNB-C**  
Slab-to-Wall  
Thermal Movement  
Seismic Movement 15" Max.

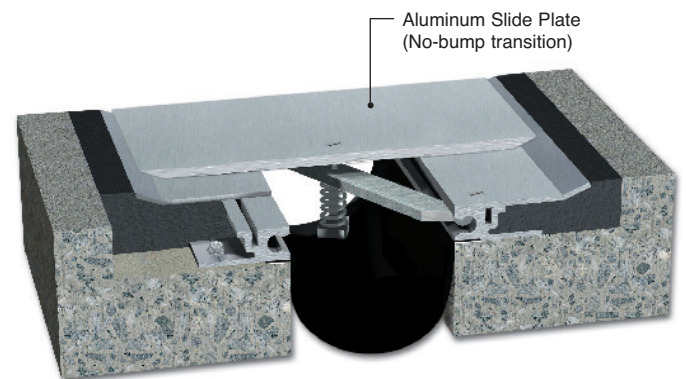

**Note:** Limited thermal movement engineered for climate controlled interior environments.



**Seismic designs reduce the risk of catastrophic structural damage**

### PROJECTS

- 1 Meadowlands Garage, NJ  
SSP with Elevated Wash
- 2 Toronto Pearson  
International Airport,  
with asphalt overlay.
- 3 Front Street Garage CT,  
with brick pavers.





# MM<sup>®</sup> Cast-In Seismic System

## Performance Data

**Cast-in-place heavy-duty metal seismic system for post-tensioned concrete decks.**

- Cast-in design eliminates need for blockouts and associated structural repairs.
- High strength hook bolts adjust around post tension cables.
- Slide plate incorporates high-density elastoprene impact and sound dampers.
- Seismic centering device with dynamic load impact dampers.
- Replaceable fabric reinforced rubber waterproofing gutter.
- Cast-In design eliminates slab-to-slab vertical offsets.
- ADA compliant slide plate with slip resistant finish.


### Product Features




## Movement Table

| MODEL      | Total Movement | Joint Opening "A" |           | Slide Plate "B" |           | Base Width "C" |  |
|------------|----------------|-------------------|-----------|-----------------|-----------|----------------|--|
|            |                | Min.              | Max.      |                 |           |                |  |
| CIS-400    | 3.5" 89        | 2.5" 64           | 6.0" 152  | 8.0" 203        | 5.25" 133 |                |  |
| CIS-600    | 6.5" 165       | 2.5" 64           | 9.0" 229  | 11.0" 279       | 5.25" 133 |                |  |
| CIS-800    | 9.5" 241       | 2.5" 64           | 12.0" 305 | 14.0" 356       | 7.25" 184 |                |  |
| CIS-1000   | 12.5" 318      | 2.5" 64           | 15.0" 381 | 17.0" 432       | 7.25" 184 |                |  |
| CIS-1200   | 15.5" 394      | 2.5" 64           | 18.0" 457 | 20.0" 508       | 7.25" 184 |                |  |
| CIS-C-400  | 2.5" 64        | 2.5" 64           | 5.0" 127  | 5.5" 140        | 5.25" 133 |                |  |
| CIS-C-600  | 5.0" 127       | 2.5" 64           | 7.5" 191  | 8.0" 203        | 5.25" 133 |                |  |
| CIS-C-800  | 7.5" 191       | 2.5" 64           | 10.0" 254 | 10.5" 267       | 7.25" 184 |                |  |
| CIS-C-1000 | 10.0" 254      | 2.5" 64           | 12.5" 318 | 13.0" 330       | 7.25" 184 |                |  |
| CIS-C-1200 | 12.5" 318      | 2.5" 64           | 15.0" 381 | 15.5" 394       | 7.25" 184 |                |  |


Dimension shown in **inches (bold)** and millimeters.  
Larger sizes available. Call MM Systems for details.  
**BIS & BIS-C Series** movement tables identical.

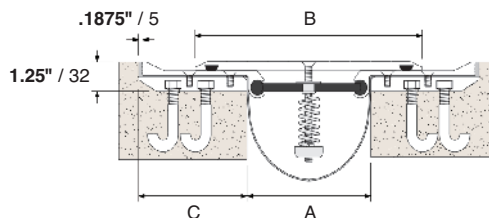


Model CIS

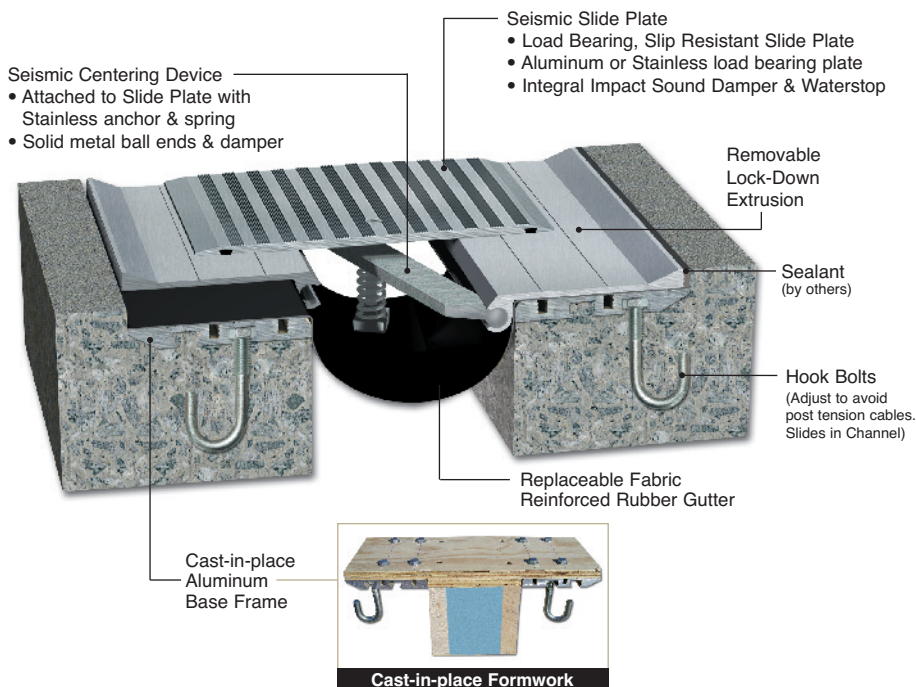

## CIS Series / Cast-In / Post Tensioned Concrete

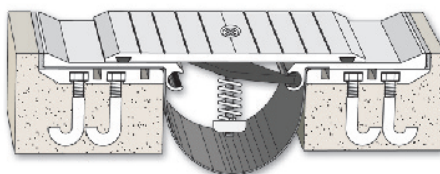


**Model CIS**  
Slab-to-Slab / Movement 2.5" to 15.0"  
Cast-In-Place Design

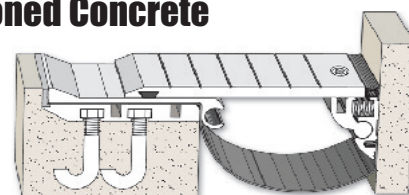


**Model CIS-C**  
Slab-to-Wall / Movement 2.5" to 12.5"  
Cast-In-Place Design

## BIS Series / Bolt-In / Recessed Blockout

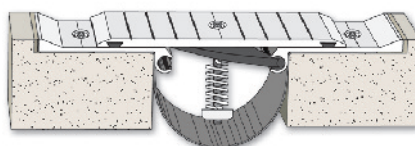

**Model BIS**  
Slab-to-Slab / Movement 2.5" to 15.0"  
Bolt-In Seismic Low Profile Design

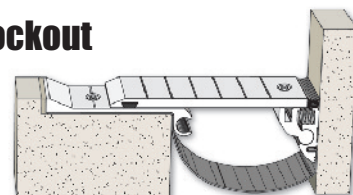

**Model BIS-C**  
Slab-to-Wall / Movement 2.5" to 12.5"  
Bolt-In Seismic Low Profile Design



### PROJECTS

- 1 Boston Airport (Before) Terminal to Roadway
- 2 Boston Airport (After) Terminal to Roadway CIS-SSM Custom Design
- 3 Sacramento Airport Installation of Seismic Slide Plate








# MM<sup>®</sup> Surface Mount Seismic Cover System

## Performance Data

### Heavy-duty surface mounted seismic metal cover for wide joints without blockouts.

- No blockout design is ideal for new and retrofit construction.
- Load rated heavy-duty metal slide plate with impact and sound dampener.
- Seismic centering device with dynamic load impact dampener.
- Aluminum base member incorporates tire impact deflection design.
- Available with optional LokCrete<sup>®</sup> Bedding Compound.
- Integral fabric reinforced rubber waterproofing gutter.
- ADA compliant slide plate with slip resistant surface.


### Product Features

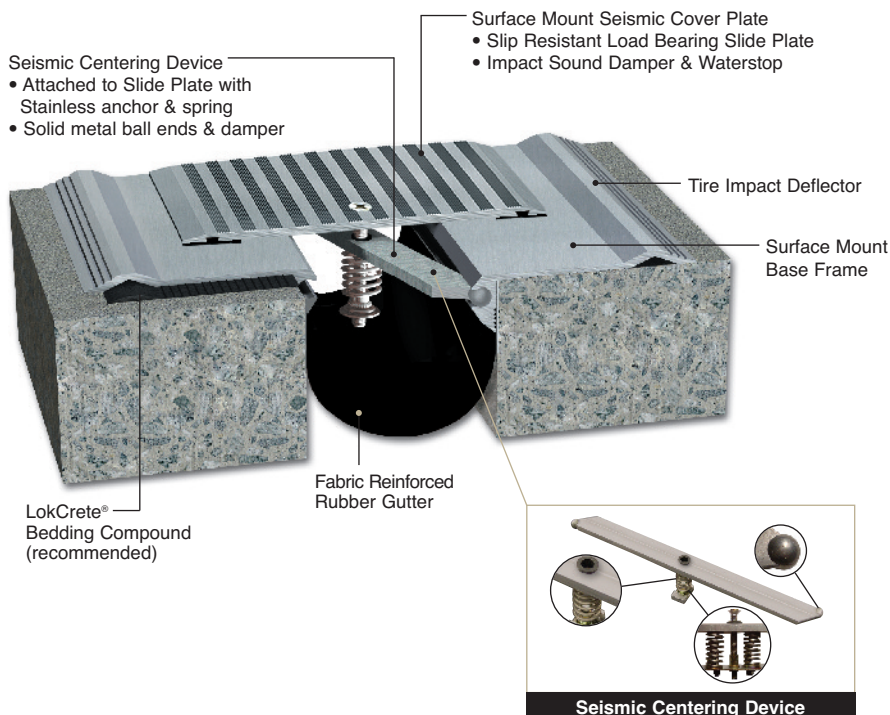


## Movement Table

| MODEL      | Total Movement | Joint Opening "A" |              |              | Slide Plate "B" | Base Member "C" |
|------------|----------------|-------------------|--------------|--------------|-----------------|-----------------|
|            |                | Seismic Min.      | Thermal Min. | Seismic Max. |                 |                 |
| SMS-400    | 4.0" 102       | 2.0" 51           | 2.0" 51      | 6.0" 152     | 8.0" 203        | 6.375" 162      |
| SMS-600    | 6.0" 152       | 2.0" 51           | 3.0" 76      | 9.0" 229     | 11.0" 279       | 6.375" 162      |
| SMS-800    | 8.0" 203       | 2.0" 51           | 4.0" 102     | 12.0" 305    | 14.0" 356       | 8.375" 213      |
| SMS-1000   | 10.0" 254      | 2.0" 51           | 5.0" 127     | 15.0" 381    | 17.0" 432       | 8.375" 213      |
| SMS-1200   | 12.0" 305      | 2.0" 51           | 8.0" 203     | 18.0" 457    | 20.0" 508       | 8.375" 213      |
| SMS-C-400  | 3.0" 76        | 1.0" 25           | 2.0" 51      | 5.0" 127     | 5.5" 140        | 6.375" 162      |
| SMS-C-600  | 4.5" 114       | 1.0" 25           | 3.0" 76      | 7.5" 191     | 8.0" 203        | 6.375" 162      |
| SMS-C-800  | 6.0" 152       | 1.0" 25           | 4.0" 102     | 10.0" 254    | 10.5" 267       | 8.375" 213      |
| SMS-C-1000 | 7.5" 191       | 1.0" 25           | 5.0" 127     | 12.5" 318    | 13.0" 330       | 8.375" 213      |
| SMS-C-1200 | 9.0" 229       | 1.0" 25           | 8.0" 203     | 15.0" 381    | 15.5" 394       | 8.375" 213      |


Dimension shown in **inches (bold)** and millimeters.  
Larger sizes available. Call MM Systems for details.  
Contact MM Systems for stainless steel slide plate models.

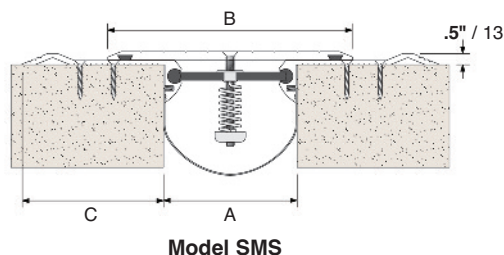


Model SMS

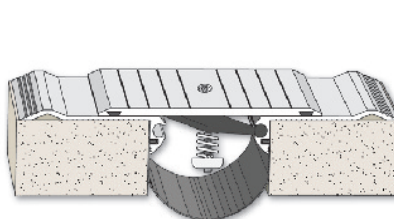

**Model SMS**  
Slab-to-Slab / Movement 2.0" to 15.0"

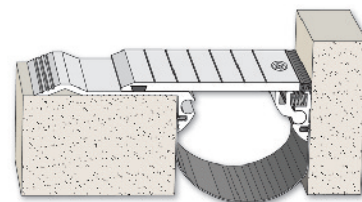

**Model SMS-C**  
Slab-to-Wall / Movement 2.0" to 12.5"

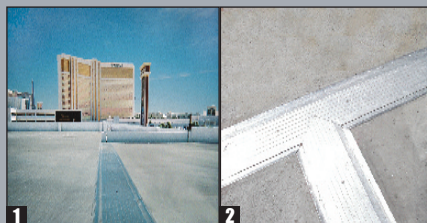

- PROJECTS**
- 1 Fashion Show Mall, Las Vegas
  - 2 "T" Transition Multi-Directional Movement
  - 3 Seismic Centering Devices for Slide Plate Systems






# MM<sup>®</sup> Hinged Safety Cover System

## Performance Data

**Aluminum cover with integral hinge to accommodate vertical offsets in concrete decks.**

- Load rated heavy-duty aluminum slide plate with impact and sound dampener.
- Hinge design accommodates vertical offsets in concrete decks.
- Integral fabric reinforced rubber waterproofing gutter.
- Available with optional LokCrete<sup>®</sup> Bedding Compound.
- ADA compliant design with slip resistant raised pattern surface.




### Product Features




## Movement Table

| MODEL      | Total Movement |     | Joint Opening "A" |         |         |     | System Width "B" |     |
|------------|----------------|-----|-------------------|---------|---------|-----|------------------|-----|
|            |                |     | Minimum           | Nominal | Maximum |     |                  |     |
| HSC-200    | 2.0"           | 51  | 1.0"              | 25      | 2.0"    | 51  | 3.0"             | 76  |
| HSC-400    | 5.0"           | 127 | 1.0"              | 25      | 4.0"    | 102 | 6.0"             | 152 |
| HSC-600    | 8.0"           | 203 | 1.0"              | 25      | 6.0"    | 152 | 9.0"             | 229 |
| HSC-800    | 11.0"          | 279 | 1.0"              | 25      | 8.0"    | 203 | 12.0"            | 305 |
| HSC-1000   | 14.0"          | 356 | 1.0"              | 25      | 10.0"   | 254 | 15.0"            | 381 |
| HSC-1200   | 17.0"          | 432 | 1.0"              | 25      | 12.0"   | 305 | 18.0"            | 457 |
| HSC-C-200  | 2.0"           | 51  | 1.0"              | 25      | 2.0"    | 51  | 3.0"             | 76  |
| HSC-C-400  | 5.0"           | 127 | 1.0"              | 25      | 4.0"    | 102 | 6.0"             | 152 |
| HSC-C-600  | 8.0"           | 203 | 1.0"              | 25      | 6.0"    | 152 | 9.0"             | 229 |
| HSC-C-800  | 11.0"          | 279 | 1.0"              | 25      | 8.0"    | 203 | 12.0"            | 305 |
| HSC-C-1000 | 14.0"          | 356 | 1.0"              | 25      | 10.0"   | 254 | 15.0"            | 381 |
| HSC-C-1200 | 17.0"          | 432 | 1.0"              | 25      | 12.0"   | 305 | 18.0"            | 457 |

Dimension shown in **inches (bold)** and millimeters.  
Larger sizes available. Call MM Systems for details.

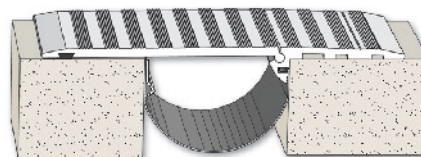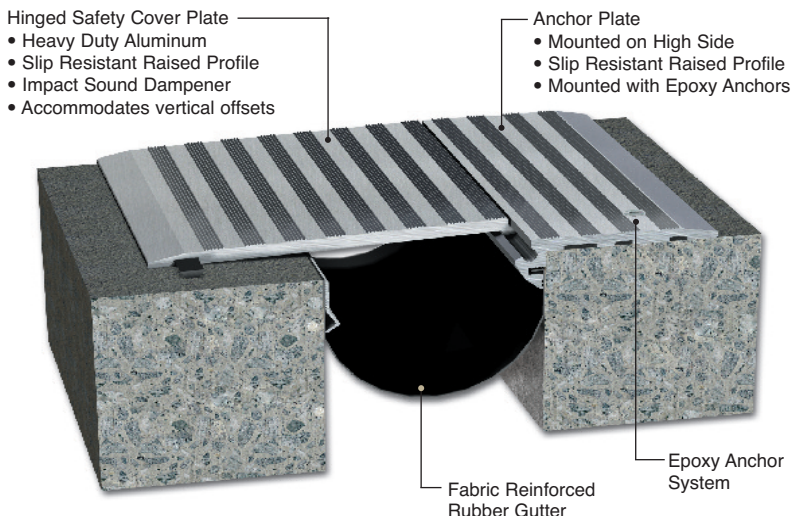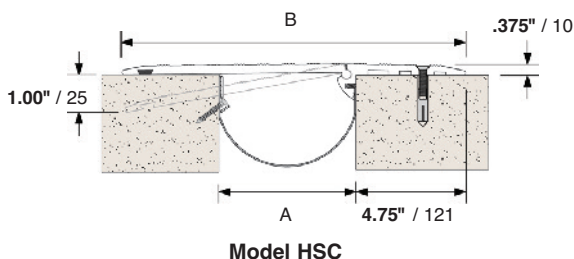


**Model HSC**  
Slab-to-Slab / Movement 1.0" to 15.0"

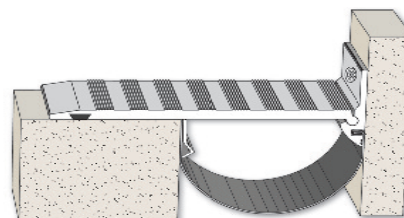

**Model HSC-C**  
Slab-to-Wall / Movement 1.0" to 15.0"



- ### PROJECTS
- 1 Marta Station Parking Deck, Denver
  - 2 Bridge Application
  - 3 HSS System "Z" Joint Transition








# MM<sup>®</sup> Rubber Safety Cover System

## Performance Data

**Dual hinged aluminum cover with impact absorbing rubber nosing pads that accommodates vertical offsets in concrete decks.**

- For covering expansion joints openings with recessed joint systems or fillers.
- Ideal for high traffic pedestrian areas.
- Safety Cover with rubber impact/nosing pads that flex independently.
- Rated for low speed vehicular traffic.
- Heavy-duty convex shaped aluminum cover with raised slip-resistant pattern.
- Integral slip-resistant rubber safety strips.
- Provides smooth transition between uneven surfaces.
- Convex aluminum cover accommodates greater vertical offsets.
- Complies with ADA guidelines



### Product Features




## Movement Table

| MODEL    | Total Movement |     | Thermal Opening "JO" |         |          |           | Seismic "JO" |     | System Width "SW" |     |
|----------|----------------|-----|----------------------|---------|----------|-----------|--------------|-----|-------------------|-----|
|          |                |     | Minimum              | Nominal | Maximum  |           |              |     |                   |     |
| RSC-450  | 4.5"           | 114 | 0"                   | 0       | 1.0" 25  | 1.5" 38   | 4.5"         | 114 | 13.0"             | 330 |
| RSC-450  | 4.5"           | 114 | 0"                   | 0       | 2.0" 51  | 3.0" 76   | 4.5"         | 114 | 13.0"             | 330 |
| RSC-450  | 4.5"           | 114 | 0"                   | 0       | 3.0" 76  | 4.5" 114  | 4.5"         | 114 | 13.0"             | 330 |
| RSC-850  | 8.25"          | 210 | 0"                   | 0       | 4.0" 102 | 6.0" 152  | 8.25"        | 210 | 17.0"             | 432 |
| RSC-850  | 8.25"          | 210 | 0"                   | 0       | 5.0" 127 | 7.5" 191  | 8.25"        | 210 | 17.0"             | 432 |
| RSC-1000 | 10.0"          | 254 | 0"                   | 0       | 6.0" 152 | 9.0" 229  | 10.0"        | 254 | 18.5"             | 470 |
| RSC-1000 | 10.0"          | 254 | 0"                   | 0       | 7.0" 178 | 10.0" 254 | 10.0"        | 254 | 18.5"             | 470 |
| RSC-1200 | 12.0"          | 305 | 0"                   | 0       | 8.0" 203 | 12.0" 305 | 12.0"        | 305 | 20.5"             | 521 |
| RSC-1200 | 12.0"          | 305 | 0"                   | 0       | 9.0" 229 | 12.0" 305 | 12.0"        | 305 | 20.5"             | 521 |

Dimension shown in **inches (bold)** and millimeters.

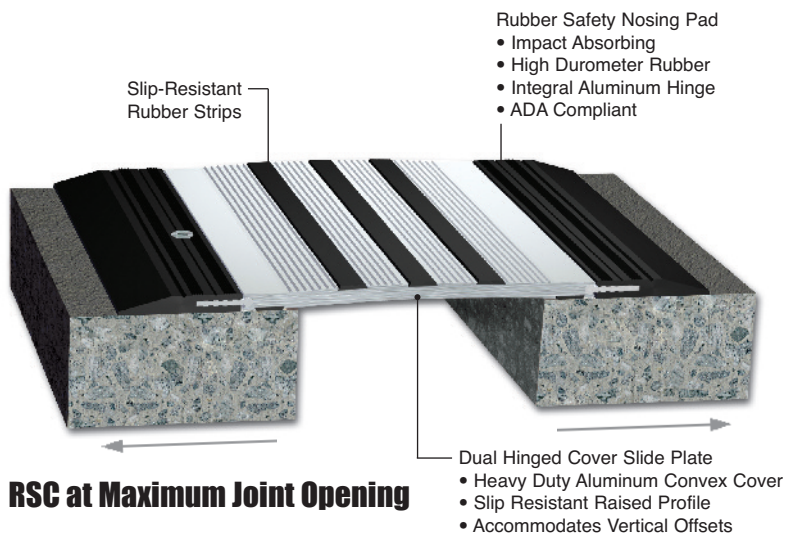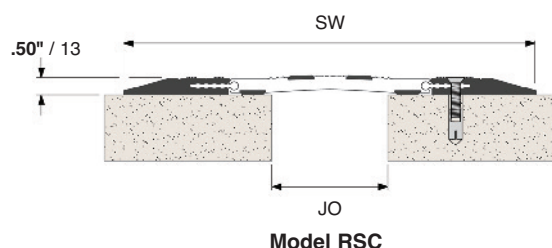

Wide safety cover provides gradual transition between concrete decks with vertical offsets

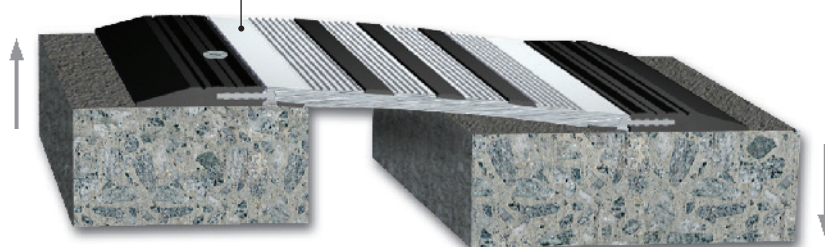

## RSC at Maximum Vertical Offset



**Model RSC**  
Vehicular Slab-to-Slab / Movement 0" to 7.5"  
Pedestrian Slab-to-Slab / Movement 0" to 8.5"



**Model RSC-C**  
Pedestrian Slab-to-Slab / Movement 0" to 8.5"



- PROJECTS**
- 1 ADA Compliant High Volume Pedestrian Applications
  - 2 Vehicular Rated Design
  - 3 Rubber Safety Nosing Pads provide a smooth deck-to-deck transition





# MM<sup>®</sup> Impact Damping Systems

## Performance Data

Galvanized or Aluminum cover epoxy anchored on one side with impact absorbing rubber base pads and fabric reinforced rubber gutter.

- Load rated heavy-duty aluminum or galvanized steel slide plate.
- EPDM Rubber base pads absorb vehicular impact loads.
- Fabric reinforced rubber waterproofing gutter with optional drain tube assembly.
- Anchored with epoxy bonded insert anchors and stainless steel bolts.
- GID crowned slide plate or AID flat recessed slide plate.

### Product Features



## Movement Table


| MODEL    | Total Movement |     | Joint Opening "A" |         |              |     | Cover "B" |     | Block Out "C" |     |
|----------|----------------|-----|-------------------|---------|--------------|-----|-----------|-----|---------------|-----|
|          |                |     | Thermal Min.      | Nominal | Thermal Max. |     |           |     |               |     |
| GID-200  | 2.0"           | 51  | 1.0"              | 25      | 2.0"         | 51  | 3.0"      | 76  | 4.125"        | 105 |
| GID-300  | 3.0"           | 76  | 1.5"              | 38      | 3.0"         | 76  | 4.5"      | 114 | 5.125"        | 130 |
| GID-400  | 4.0"           | 102 | 2.0"              | 51      | 4.0"         | 102 | 6.0"      | 152 | 6.125"        | 156 |
| GID-500  | 5.0"           | 127 | 2.5"              | 64      | 5.0"         | 127 | 7.5"      | 191 | 7.125"        | 181 |
| GID-600  | 6.0"           | 152 | 3.0"              | 76      | 6.0"         | 152 | 9.0"      | 229 | 8.125"        | 206 |
| GID-700  | 7.0"           | 178 | 3.5"              | 89      | 7.0"         | 178 | 10.5"     | 267 | 9.125"        | 232 |
| GID-800  | 8.0"           | 203 | 4.0"              | 102     | 8.0"         | 203 | 12.0"     | 305 | 10.125"       | 257 |
| GID-900  | 9.0"           | 229 | 4.5"              | 114     | 9.0"         | 229 | 13.5"     | 343 | 11.125"       | 283 |
| GID-1000 | 10.0"          | 254 | 5.0"              | 127     | 10.0"        | 254 | 15.0"     | 381 | 12.125"       | 308 |

Joint Opening "A" can close to 0" during a seismic event.



Dimension shown in **inches (bold)** and millimeters.

When specifying slab-to-wall condition, add "C" after model number (eg. AID-C-200 or GID-C-200).


AID movement table identical.

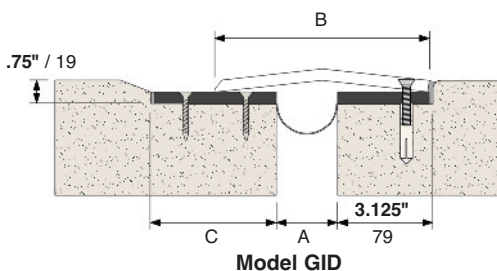

## GID - Galvanized Impact Damping System

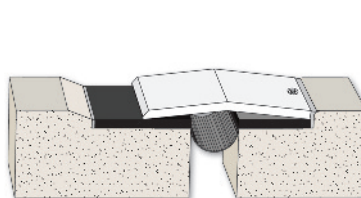
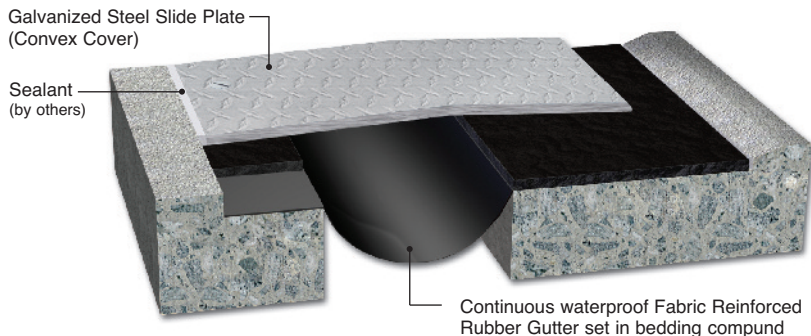


**Model GID**  
Slab-to-Slab / Movement 1.0" to 15.0"

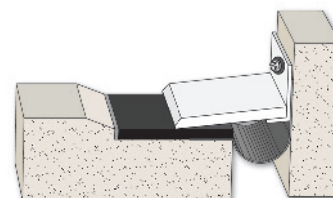


**Model GID-C**  
Slab-to-Wall / Movement 1.0" to 15.0"

## AID - Aluminum Impact Damping System

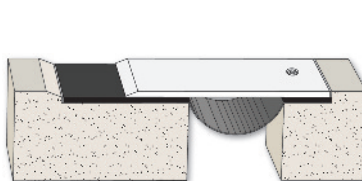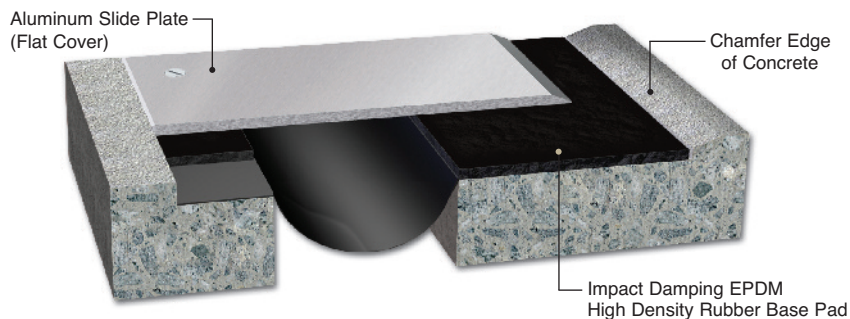

**Model AID**  
Slab-to-Slab / Movement 1.0" to 15.0"

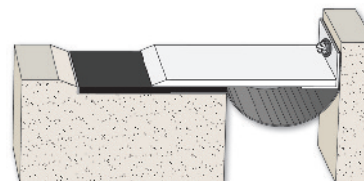

**Model AID-C**  
Slab-to-Wall / Movement 1.0" to 15.0"



### PROJECTS

- 1 MM machining center for custom slide plate designs
- 2 Platinum Garage - AID System with LokCrete Nosing
- 3 Slab-to-Wall Condition AID System







# MM<sup>®</sup> Vertical Seismic Sealing System

## Performance Data

**Vertical watertight seismic seal snap-locked into two aluminum frames.**

- No visible aluminum or hardware.
- Engineered for multi-directional seismic movement.
- Visual seals are available in standard and custom colors.
- Resistant to UV, ozone, acid rain, most chemicals and extreme temperatures.
- Splices can be heat welded or bonded with specialty adhesive.
- Continuous lengths in most applications.

### Product Features




### Color Options



## VSS - Wall to Wall





## VSS - Wall Corner

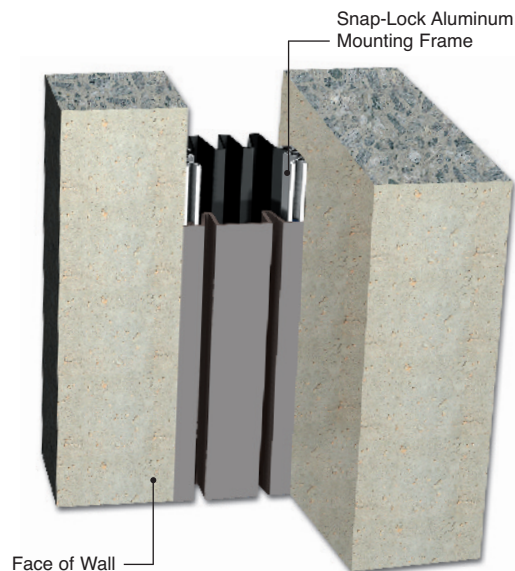


## Movement Table

| MODEL    | Total Thermal Movement | Joint Opening "A" Min. | Joint Opening "A" Max. | Seismic Max "A" | Installation Midpoint |
|----------|------------------------|------------------------|------------------------|-----------------|-----------------------|
| VSS-200  | 1.75" 44               | 1.25" 32               | 3.00" 76               | 10.00" 250      | 2.00" 51              |
| VSS-300  | 3.25" 83               | 1.25" 32               | 4.50" 114              | 10.00" 250      | 3.00" 76              |
| VSS-400  | 4.25" 108              | 1.75" 44               | 6.00" 152              | 10.00" 250      | 4.00" 102             |
| VSS-500  | 5.75" 146              | 1.75" 44               | 7.50" 191              | 17.00" 432      | 5.00" 127             |
| VSS-600  | 7.25" 184              | 1.75" 44               | 9.00" 229              | 17.00" 432      | 6.00" 152             |
| VSS-700  | 8.00" 203              | 4.00" 102              | 12.00" 305             | 18.00" 457      | 7.00" 178             |
| VSS-800  | 8.00" 203              | 4.00" 102              | 12.00" 305             | 18.00" 457      | 8.00" 203             |
| VSS-900  | 11.00" 279             | 4.00" 102              | 15.00" 381             | 24.00" 610      | 9.00" 229             |
| VSS-1000 | 11.00" 279             | 4.00" 102              | 15.00" 381             | 24.00" 610      | 10.00" 254            |


Dimension shown in **inches (bold)** and millimeters.  
Larger sizes available. Call MM Systems for details.

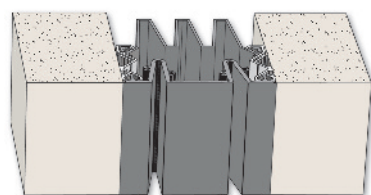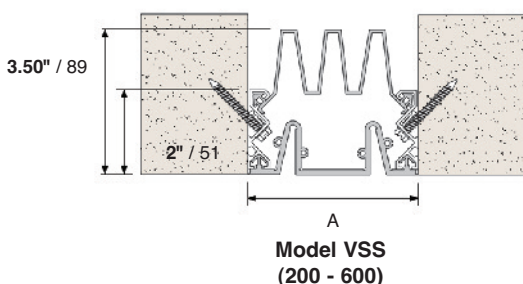

**Model VSS**  
Wall-to-Wall / Thermal  
Nominal Joint Openings 2" to 6"  
Movement 1.25" to 17"

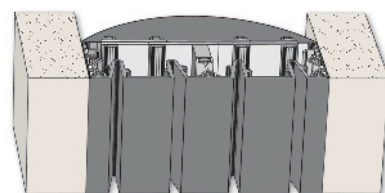

**Model VSS**  
Wall-to-Wall / Seismic  
Nominal Joint Openings 7" to 10"  
Movement 4" to 24"



- PROJECTS**
- 1 Providence, RI - VSS-800
  - 2 San Diego Stadium - VSS Multi-Transition Capability
  - 3 Cleveland Clinic - VSS Joint Between Hospital and Garage





# MM<sup>®</sup> ColorJoint / ESS Series

## Performance Data

**Engineered seismic silicone sealant factory bonded to a rectangular polyurethane backer support system.**

- Silicone sealing system conforms to irregular openings and is watertight, dust-proof, airtight and soundproof.
- Preformed silicone strip bonded to a rectangular polyurethane backer support system.
- 3-sided bonding of seal with a primerless one-part silicone sealant.
- 1/2" thick silicone strip virtually eliminates possibility of punctures.
- Non flammable and resistant to UV, ozone, wind driven rain and extreme temperatures.
- Easy to install, no fasteners or anchors.
- Available with a 5-year warranty through Certified Contractor Network.


### Product Features



## Movement Table

| MODEL   | Total Movement | Joint Opening "A" | Installation Range "A" |
|---------|----------------|-------------------|------------------------|
|         |                | Min. Max.         | Min. Max.              |
| ESS-100 | 1.00" 25       | 0.50" 13          | 1.50" 38               |
| ESS-150 | 1.50" 38       | 0.75" 19          | 2.25" 57               |
| ESS-200 | 2.00" 51       | 1.00" 25          | 3.00" 76               |
| ESS-250 | 2.50" 64       | 1.25" 32          | 3.75" 95               |
| ESS-300 | 3.00" 76       | 1.50" 38          | 4.50" 114              |
| ESS-350 | 3.50" 89       | 1.75" 44          | 5.25" 133              |
| ESS-400 | 4.00" 102      | 2.00" 51          | 6.00" 152              |
| ESS-450 | 4.50" 114      | 2.25" 57          | 6.75" 171              |
| ESS-500 | 5.00" 127      | 2.50" 64          | 7.50" 191              |
| ESS-600 | 6.00" 152      | 3.00" 76          | 9.00" 229              |
| ESS-700 | 7.00" 178      | 3.50" 89          | 10.50" 267             |


Dimension shown in **inches** (bold) and millimeters.  
Larger sizes available. Call MM Systems for details.

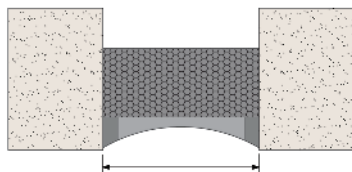




Model ESS

## ESS - Engineered Seismic Silicone Sealing System (Vertical)


### STANDARD COLORS (STOCK)




### CUSTOM COLORS

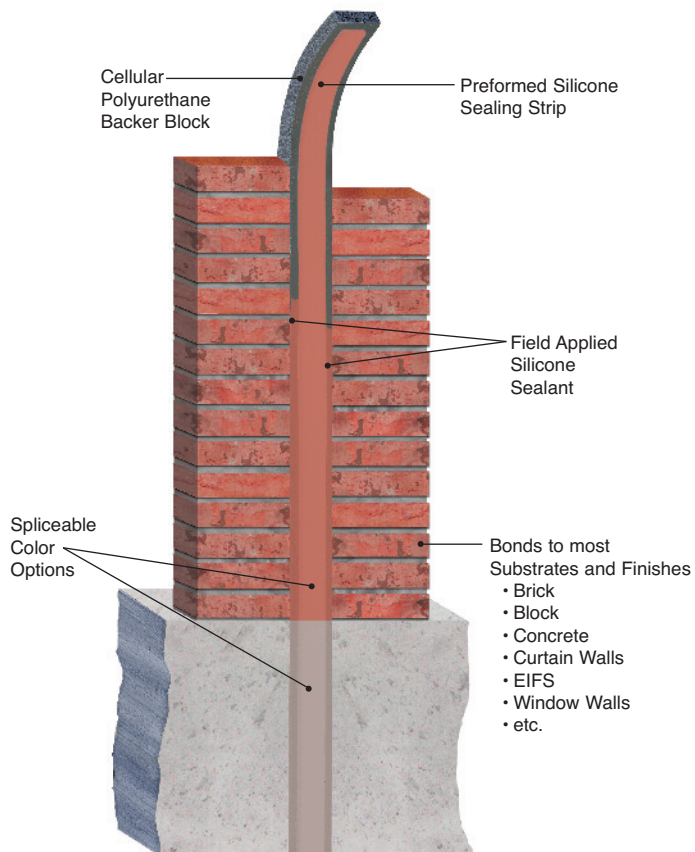

**Model ESS**  
Wall-to-Wall / Movement .50" to 10.5"  
Wall Corner Condition Similar




**Model ESS**  
Slab-to-Slab / Movement .50" to 10.5"  
(May require a cover plate - not shown)  
Slab-to-Wall Condition Similar

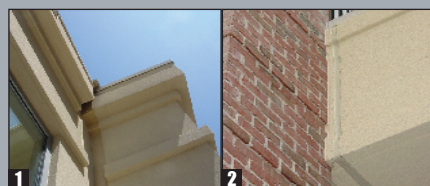

### PROJECTS

- 1 ColorJoint ESS in EIFS Application
- 2 ColorJoint ESS in Brick Application
- 3 University of Massachusetts Secondary Waterproofing Seal Application








# MM<sup>®</sup> ColorJoint / SIF Series

## Performance Data

Seismic silicone face seal factory applied to polyurethane microcell foam impregnated with a waterproof polymer sealing compound.

- $\pm 50\%$  seismic movement capability with near zero tensile stress at bond line.
- Conforms to irregular openings virtually eliminating the risk of costly water damage.
- Binary silicone seal and impregnated foam nearly eliminates possibility of punctures.
- Permanently elastic and will expand and accommodate the required joint movement.
- Watertight, dust-proof, airtight, soundproof seal resilient and flexible to  $-39^{\circ}\text{F}$ .
- Provides interior vapor, dust, acoustical, air and sound-dampening control.


### Product Features



## Movement Table


| MODEL   | Total Movement |     | Movement Range "A" |     |        | Expansion Joint Size |     |                |
|---------|----------------|-----|--------------------|-----|--------|----------------------|-----|----------------|
|         |                |     | Min.               |     | Max.   | Nominal              |     | Seal Depth "B" |
| SIF-050 | 0.50"          | 13  | 0.250"             | 6   | 0.750" | 0.50"                | 13  | 1.50"          |
| SIF-063 | 0.63"          | 16  | 0.312"             | 8   | 0.938" | 0.63"                | 16  | 1.50"          |
| SIF-075 | 0.75"          | 19  | 0.375"             | 10  | 1.125" | 0.75"                | 19  | 1.50"          |
| SIF-100 | 1.00"          | 25  | 0.500"             | 13  | 1.500" | 1.00"                | 25  | 2.00"          |
| SIF-125 | 1.25"          | 32  | 0.625"             | 16  | 1.875" | 1.25"                | 32  | 2.00"          |
| SIF-150 | 1.50"          | 38  | 0.750"             | 19  | 2.250" | 1.50"                | 38  | 2.00"          |
| SIF-175 | 1.75"          | 44  | 0.875"             | 22  | 2.625" | 1.75"                | 44  | 2.00"          |
| SIF-200 | 2.00"          | 51  | 1.00"              | 25  | 3.00"  | 2.00"                | 51  | 3.00"          |
| SIF-225 | 2.25"          | 57  | 1.125"             | 29  | 3.375" | 2.25"                | 57  | 3.00"          |
| SIF-250 | 2.50"          | 64  | 1.250"             | 32  | 3.750" | 2.50"                | 64  | 3.00"          |
| SIF-275 | 2.75"          | 70  | 1.375"             | 35  | 4.150" | 2.75"                | 70  | 3.00"          |
| SIF-300 | 3.00"          | 76  | 1.500"             | 38  | 4.500" | 3.00"                | 76  | 3.00"          |
| SIF-325 | 3.25"          | 83  | 1.562"             | 40  | 4.812" | 3.25"                | 83  | 3.00"          |
| SIF-350 | 3.50"          | 89  | 1.750"             | 44  | 5.250" | 3.50"                | 89  | 3.00"          |
| SIF-375 | 3.75"          | 95  | 1.875"             | 48  | 5.625" | 3.75"                | 95  | 4.00"          |
| SIF-400 | 4.00"          | 102 | 2.00"              | 51  | 6.00"  | 4.00"                | 102 | 4.00"          |
| SIF-500 | 5.00"          | 127 | 2.50"              | 64  | 7.50"  | 5.00"                | 127 | 4.00"          |
| SIF-600 | 6.00"          | 152 | 3.00"              | 76  | 9.00"  | 6.00"                | 152 | 4.00"          |
| SIF-700 | 7.00"          | 178 | 3.50"              | 89  | 10.50" | 7.00"                | 178 | 5.00"          |
| SIF-800 | 8.00"          | 203 | 4.00"              | 102 | 12.00" | 8.00"                | 203 | 5.00"          |

Dimension shown in **inches (bold)** and millimeters.




Model SIF


## SIF - Seismic Silicone & Impregnated Foam System (Vertical)

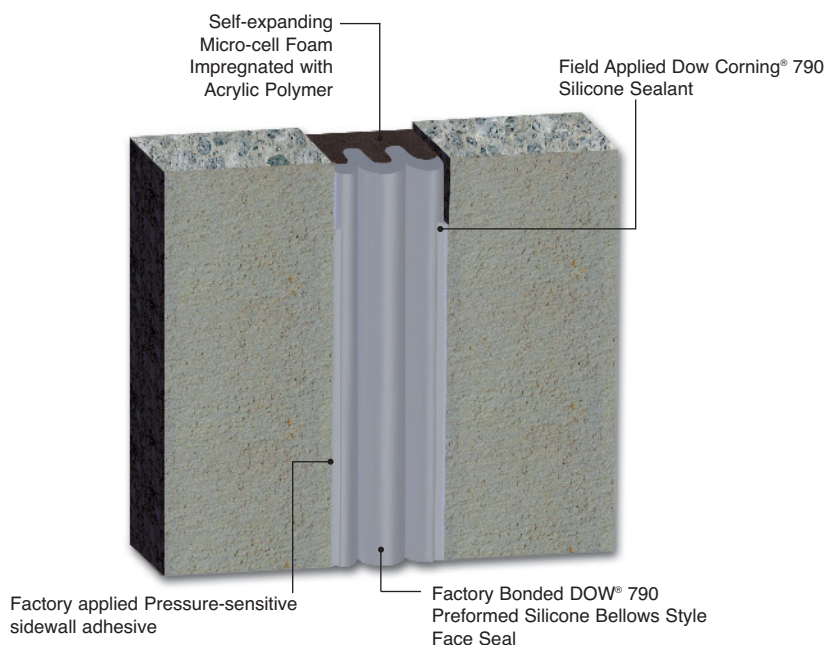

DOW<sup>®</sup> 790 is a registered trademark of Dow Corning

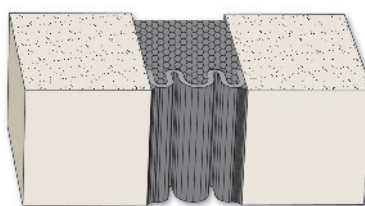

Model SIF  
Wall-to-Wall / Movement .25" to 12.0"

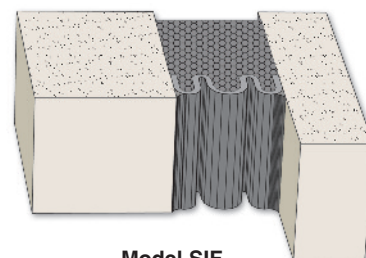


Model SIF  
Wall Corner / Movement .25" to 12.0"

## Colors



- PROJECTS**
- 1 Accommodates Variable Substrates - Precast, Window Wall and Brick
  - 2 Narrow Sight Line Design Makes ColorJoint SIF Nearly Invisible
  - 3 St. Paul's Travelers Insurance Project

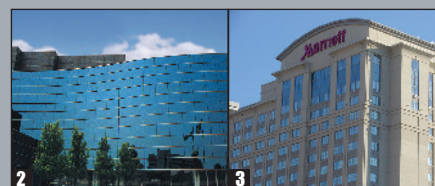



# MM<sup>®</sup> Pyro-Flex Fire Barrier Systems

## Performance Data

Fire barrier systems with thermal, seismic and lateral shear capability. Used in conjunction with expansion joint systems.

### Endurance:

- 1, 2, 3 and 4 Hour Ratings Available

### Maximum Openings:

- Up to 48" and larger

### Performance Standards:

- UL 2079-Class I, II and III
- ASTM E-119
- ASTM E-1966
- ASTM E-1399

### Code Compliance:

- UBC, SBC, BOCA, IBC, CAN-S101, ICC-ES

### Testing / Listing Agencies:

- Intertek Laboratories (Includes Omega Point Lab)
- Underwriters Laboratories

### Tested Performance Criteria:

- Preconditioned cycle testing up to 5000 cycles for seismic movement
- Superimposed loading including hose stream
- Positive pressure
- Factory and field splices/transitions
- Air leakage/smoke migration
- Seismic lateral shear
- Coverless applications

### Availability:


- For hourly ratings and movement ranges, contact MM Systems.



## Pyro-Flex / Blockout Floor / PF Series

High performance continuous floor fire barrier system that maintains a seal to prevent smoke and fire spread when used with any floor expansion joint system.


Pyro-Flex Fire Barriers compatible with all MM Expansion Joint Systems

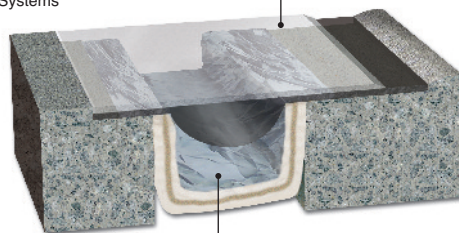

- PF Series - Floor Fire Barrier**
- Thermal, Seismic and Shear Movement Designs Available
  - Caulkless Design
  - Foil and Refractory Matrix

## Pyro-Flex / Underslab / UPF Series

The industries' first fully rated floor fire barrier that can be installed from the underside of the concrete floor that allows and does not interfere with waterproofing expansion joint systems installed on the topside.

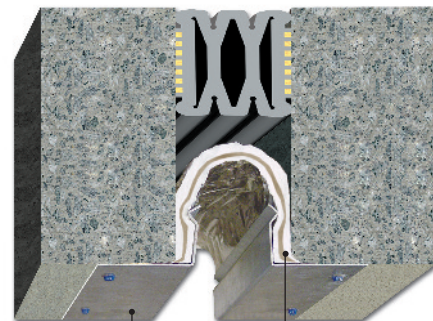

Mounting Retainer

- UPF Series - Floor Fire Barrier**
- Thermal, Seismic and Shear Movement Designs Available
  - Caulkless Design
  - Foil and Refractory Matrix

**NOTE:** Underslab Fire Barrier System can be used with any expansion joint system

## Pyro-Flex / Vertical Wall


Coverless wall fire barrier system that maintains a seal to prevent smoke and fire spread when used for chase conditions, elevator shafts or other areas with access from only one side.



- PF Series - Wall Fire Barrier / Single side**
- Foil and Refractory Matrix
  - Caulkless Design
  - Accommodates Smoke and Cycle Codes

## Pyro-Flex / Below Slab / BPF Series

The first fire barrier that installs directly to the underside of the shallow concrete deck allowing ample room for expansion joint installation.

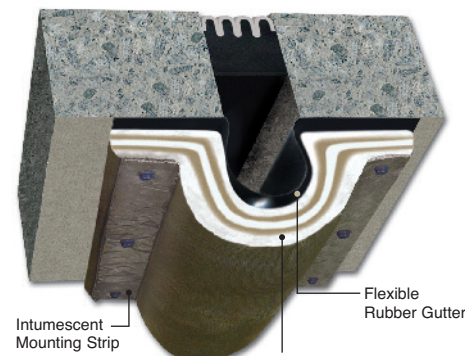

Intumescent Mounting Strip

Flexible Rubber Gutter

- BPF Series - Floor Fire Barrier**
- Thermal, Seismic and Shear Movement Designs Available
  - Caulkless Design
  - Foil and Refractory Matrix



# Important Considerations When Specifying & Selecting Fire-Rated Joints...

## 1 Movement Criteria

Fire Barriers must accommodate the same types and amount of movement that the associated Expansion Joint Systems are designed for. Movement types include thermal, wind, multi-directional shear and seismic. Movement Ranges are typically plus or minus 50% of nominal for thermal movement and up to plus or minus 100% for seismic applications.

## 2 Ratings Requirements

Fire Barrier endurance ratings are specified in hourly increments of one to four hours. Fire-Rated assemblies are a combination of Fire Barrier, Expansion Joint Covers and adjacent construction. Ratings are categorized as F (Flame), T (Thermal), or L (Air Leakage).

## 3 Code Compliance

National and local building codes have changed substantially in recent years. Rated designs must include the surrounding substrate materials. Once an isolated code requirement, Fire-Rated Barriers for Movement Joints are now commonplace in project specifications. MM has been a participant in the code development process for more than 25 years. We can help clarify the requirements for your specific project.

## 4 Testing / Listing Credentials

Code compliant Fire Barriers must meet or exceed national or international standards established by laboratories such as Intertek ETL SEMKO, or Underwriter's Laboratories. Fire Barriers should carry a listing label, indicating adherence to the stringent standards set forth by an accredited agency.

## 5 Liability Risk / Installer Credentials

Fire Barriers are a life-safety component of the structure. Accepting anything less than a single source supplier and factory trained installer may increase your liability risk. You should select products that meet code and are independently tested to the highest standards. Call (866) 506-6929 for a no-nonsense perspective on how to avoid the liability risk.



# MM<sup>®</sup> Systems Product Line



## Expansion Joints / Architectural

Aesthetics, innovation and durability are the hallmark of MM's line of floor, wall, ceiling and roof joint cover systems. Engineered systems include features that are ADA compliant, fire-rated, no-bump and heavy-load designs capable of thermal, seismic and wind-sway movement.



## Expansion Joints / Parking and Stadiums

High performance joint sealing systems designed to meet the rigorous demands of parking structures, stadiums and other open-air structures. Engineered options include systems that are waterproof, fire-rated, ADA compliant, and capable of thermal, shear and seismic movement.



## Expansion Joints / Seismic

Engineered especially for new and retrofit base-isolated structures, seismically designed, code-compliant systems provide fire-rated passage between structures before, during and after seismic events. Engineered features include multi-directional movement capability including rotation in Z axis (vertical shear). Services include design/build and design assist.



## Expansion Joints / Fire Rated / Safety

Fire barrier systems engineered and tested to current standards and code requirements. Ratings include 2, 3 and 4-hour endurance. Seismic fire barriers accommodate multi-directional movement including longitudinal shear. Vertical and horizontal systems include chase and plenum designs. Factory approved transitions insure continuity of rating throughout the structure.



## Architectural Metalwork

Engineered and fabricated to exacting tolerances, architectural metalwork by MM is available in a variety of materials and finishes. Column covers, beam wraps, light coves, sun screens or your unique designs become signature elements of your project. Choose from unlimited Kynar 500<sup>®</sup> / Hylar 5000<sup>®</sup> color coatings.



## Trench Grating and Access Covers

ADA compliant grating and trench cover systems. Decorative gratings offer an architectural alternative to traditional cast-iron gratings and are ideal for pool and plaza decks, green spaces and fountain surrounds. Removable access covers allow access to in-floor electrical and refrigeration services. Optional trench liners provide an exit path for moisture.

Certified Representative



50 MM Way • P.O. Box 98 • Pendergrass, GA 30567

**Call Toll Free 800-241-3460**

**Web Site [www.mm-usa.com](http://www.mm-usa.com)**