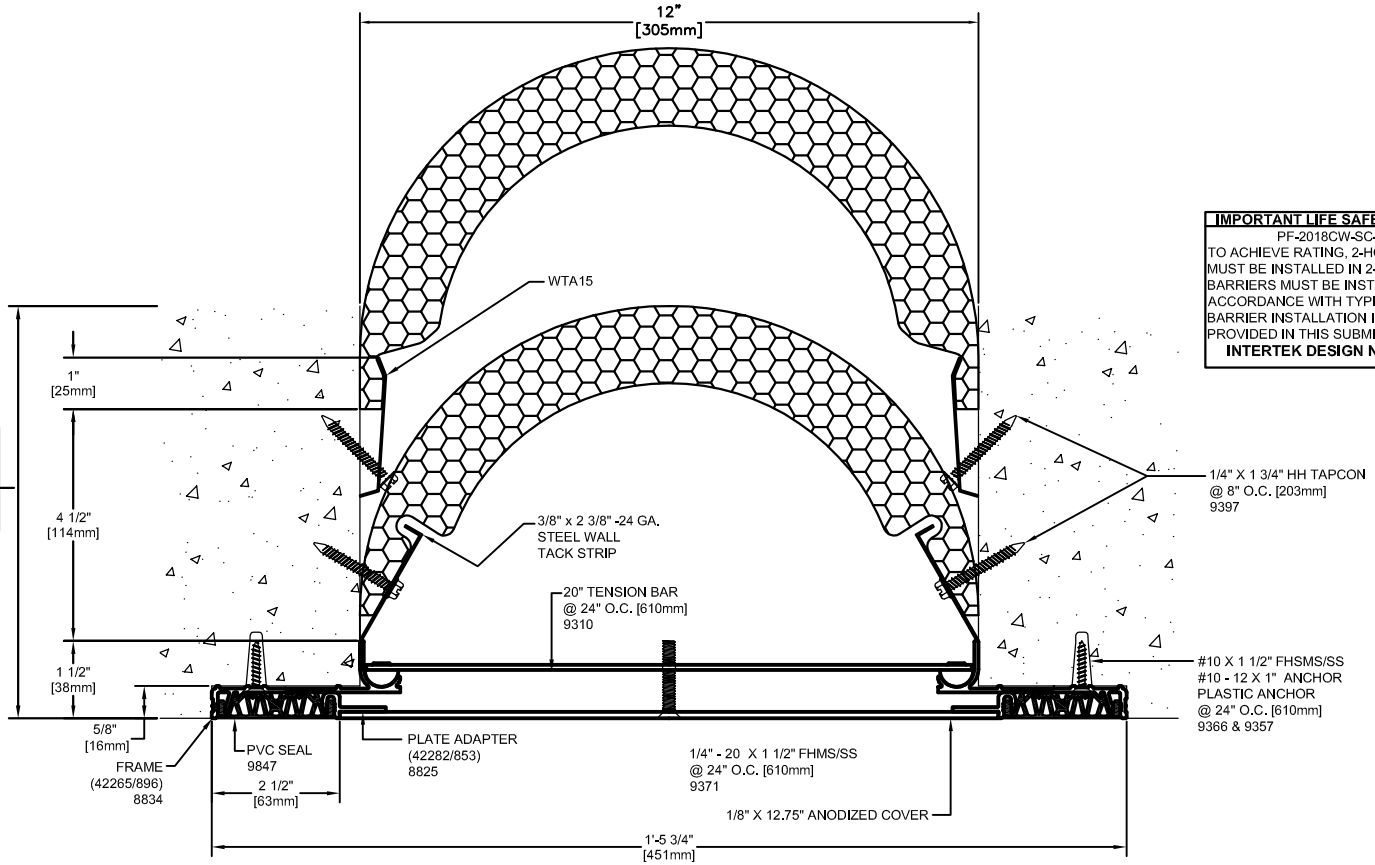

IMPORTANT LIFE SAFETY PRODUCT NOTE

PF-2018CW-SC-12-6
TO ACHIEVE RATING, 2-HOUR FIRE BARRIER MUST BE INSTALLED IN 2-HOUR RATED WALL. BARRIERS MUST BE INSTALLED IN STRICT ACCORDANCE WITH TYPICAL WALL FIRE BARRIER INSTALLATION INSTRUCTIONS PROVIDED IN THIS SUBMITTAL.
INTERTEK DESIGN NO. MM/EJV 120-03

IMPORTANT LIFE SAFETY NOTE

NOTE 2 BARRIERS REQUIRED.
MINIMUM WALL DEPTH REQUIRED FOR RATING:
8" FOR SINGLE SIDE INSTALLATION (SHOWN)
ARCHITECT / CONTRACTOR MUST VERIFY PRIOR TO FABRICATION

Model	Nominal "JT"	Joint Opening "JT"				Total Movement	Mat. Code
		Seismic Min.	Thermal Min.	Thermal Max.	Seismic Max.		
WD-1200_CONC_2HWPF_SS	12"	9.875"	11"	13"	13.375"	3.5"	EJFD1512

* NOTE THAT SEALS DISENGAGE FROM FRAME AFTER MOVEMENT EXCEEDS THERMAL MIN AND THERMAL MAX.

ARCHITECT/CONTRACTOR NOTE:
ALL SUBASSEMBLY COMPONENTS TO BE PROVIDED IN 10'-0" OR 20'-0" STOCK LENGTHS UNLESS OTHERWISE NOTED. THE SPECIFIC SYSTEMS DICTATE THE LENGTHS PROVIDED.

Approved by:_____ Date:_____

SEAL NOTE: SPECIFY SEAL COLOR

STANDARD COLORS:
- ☐ CARBON (BLACK)
- ☐ PRAIRIE (BEIGE)
- ☐ FOG (GRAY)
- ☐ LUNAR (WHITE)

*CUSTOM COLOR AVAILABLE IN MINIMUM QUANTITIES 100 LF. CONTACT MM FOR PRICING & AVAILABILITY.

Representative:	Customer:	Project:	Location:	Project Number:

M M
MM SYSTEMS

50 MM WAY
PENDERGRASS, GA. 30567
PHONE: 706-824-7500
800-241-3460
FAX: 706-824-7501

www.mmsystemscorp.com

For Spec-Data, Installation Guides, or movement requirements, contact MMSC

RIGHTS OF DESIGN

All rights of design, detail, engineering and/or invention contained herein are the property of MM Systems Corporation and hereby reserved and are not to be reproduced or provided to any other party. MM Systems Corporation reserves the right to amend or withdraw any information contained herein without notice and will not be liable for any inaccuracy or ambiguity of said information.

Model: *WD-1200_CONC_2HWPF_SS*

Drawn by:	Scale:	Drawing Number:
LMP	NTS	EJDS1512
SHT. . OF .	Issue Date: 03-05-15	