


Model	Nominal		Nominal		Thermal Movement (JO ₁)				Seismic Movement (JOs)				Total (JO∆)		Seal Depth	
Number	(JO _N)		(SL _N)		Minimum		Maximum		Minimum		Maximum		Movement		(SD)	
ASB-250	1.50	38	4.00	102	0.75	19	2.50	64	0.75	19	3.25	83	2.50	64	2.500	64
ASB-350	2.50	64	5.00	127	1.00	25	3.50	89	1.00	25	4.25	108	3.25	83	2.500	64
ASB-450	3.00	76	6.50	165	1.50	38	4.50	114	1.50	38	5.50	140	4.00	102	2.500	64
ASB-550	4.00	102	6.50	165	1.50	38	5.50	140	1.50	38	6.50	165	5.00	127	2.500	64

Dimension shown in inches (bold) and millimeters. JO = Joint Opening. SL = Sight Line. Color Options for rubber seals are Black or Special Order Gray. Elevation Tolerence-Surface areas two feet on each side of the expansion joint opening shall have identical elevations creating flush slab-to-slab transition.

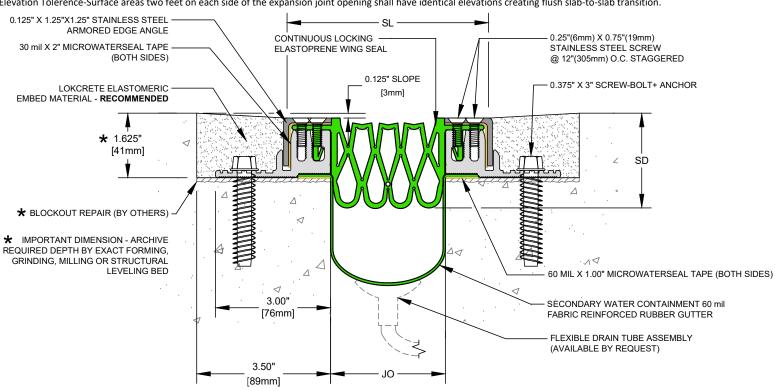

ASB Series Expansion Joint

(Slab-to-Slab)



50 MM WAY PENDERGRASS, GA. 30567 706-824-7500 PHONE 800-241-3460 TOLL FREE 706-824-7501 FAX

www.mm-usa.com

For Spec-Data, Install Guides and other data visit mm-usa.com.

RIGHTS OF DESIGN

All rights of design, detail, engineering and/or invention contained herein are the property of MM Systems Corporation and hereby reserved and are not to be reproduced or provided to any other party. MM Systems Corporation reserves the right to amend or withdraw any information contained herein without notice and will not be liable for any inaccuracy or ambiguity of said information.

Armored Strip Bolt-Down Membrane Expansion Joint ASB Series

Drawn by:	Scale:	D
DMW	NTS	
SHT. 1 OF 1	Issue Date: 02-07-2019	

Drawing Number: 31850-01