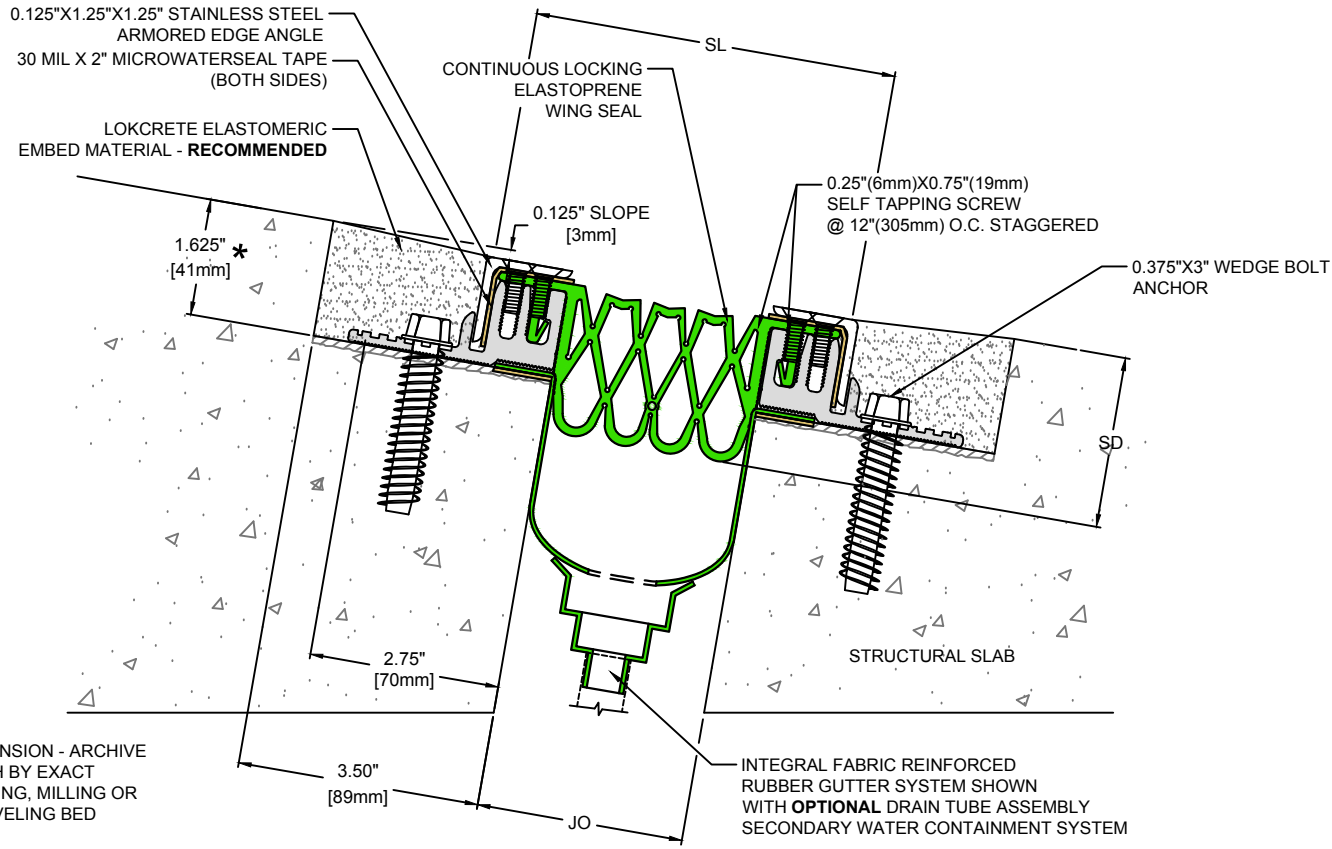


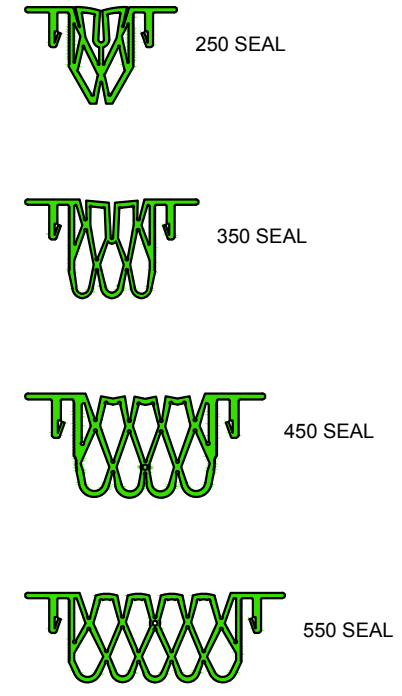

Model Number	Nominal (JO _N)		Nominal (SL _N)		Thermal Movement (JO _T)				Seismic Movement (JO _S)				Total (JO _Δ)		Seal Depth (SD)	
	Minimum	Maximum	Minimum	Maximum	Minimum	Maximum	Minimum	Maximum	Minimum	Maximum	Minimum	Maximum	Minimum	Maximum		
ASB-250	1.50	38	4.00	102	0.75	19	2.50	64	0.75	19	3.25	83	2.50	64	2.500	64
ASB-350	2.50	64	5.00	127	1.00	25	3.50	89	1.00	25	4.25	108	3.25	83	2.500	64
ASB-450	3.00	76	6.50	165	1.50	38	4.50	114	1.50	38	5.50	140	4.00	102	2.500	64
ASB-550	4.00	102	6.50	165	1.50	38	5.50	140	1.50	38	6.50	165	5.00	127	2.500	64

Dimension shown in inches (bold) and millimeters. JO = Joint Opening. SL = Sight Line. Color Options for rubber seals are Black or Special Order Gray.
Elevation Tolerance-Surface areas two feet on each side of the expansion joint opening shall have identical elevations creating flush slab-to-slab transition.



* IMPORTANT DIMENSION - ARCHIVE REQUIRED DEPTH BY EXACT FORMING, GRINDING, MILLING OR STRUCTURAL LEVELING BED

SEAL PROFILES

50 MM WAY
PENDERGRASS, GA. 30567
706-824-7500 PHONE
800-241-3460 TOLL FREE
706-824-7501 FAX
www.mm-usa.com

RIGHTS OF DESIGN
All rights of design, detail, engineering and/or invention contained herein are the property of MM Systems Corporation and hereby reserved and are not to be reproduced or provided to any other party. MM Systems Corporation reserves the right to amend or withdraw any information contained herein without notice and will not be liable for any inaccuracy or ambiguity of said information.

Armored Strip Bolt-Down Membrane Expansion Joint ASB Series

Drawn by: DMW	Scale: NTS	Drawing Number: 31852-01
SHT. 1 OF 1	Issue Date: 03-14-2016	