


Model Number	Nominal (JO _N)		Nominal (SL _N)		Thermal Movement (JO _T)		Seismic Movement (JO _S)		Total (JO _Δ)		Seal Depth (SD)	
	Minimum	Maximum	Minimum	Maximum	Minimum	Maximum	Minimum	Maximum	Minimum	Maximum	Minimum	Maximum
ECS-200	1.3125	33	1.3125	33	0.875	22	1.75	44	0.875	22	2.125	54
ECS-300	1.8750	48	1.8750	48	1.000	25	2.75	70	1.000	44	2.375	60
ECS-400	2.4325	62	2.4325	62	1.120	28	3.75	95	1.120	51	3.0625	78
ECS-500	3.0000	76	3.0000	76	1.250	32	4.75	121	1.250	32	3.500	89
ECS-600	3.6250	92	3.6250	92	1.500	38	5.75	146	1.500	38	4.250	108

Dimension shown in inches (bold) and millimeters. JO = Joint Opening, SL = Sight Line. Color Options for rubber seals are Black or Special Order Gray.

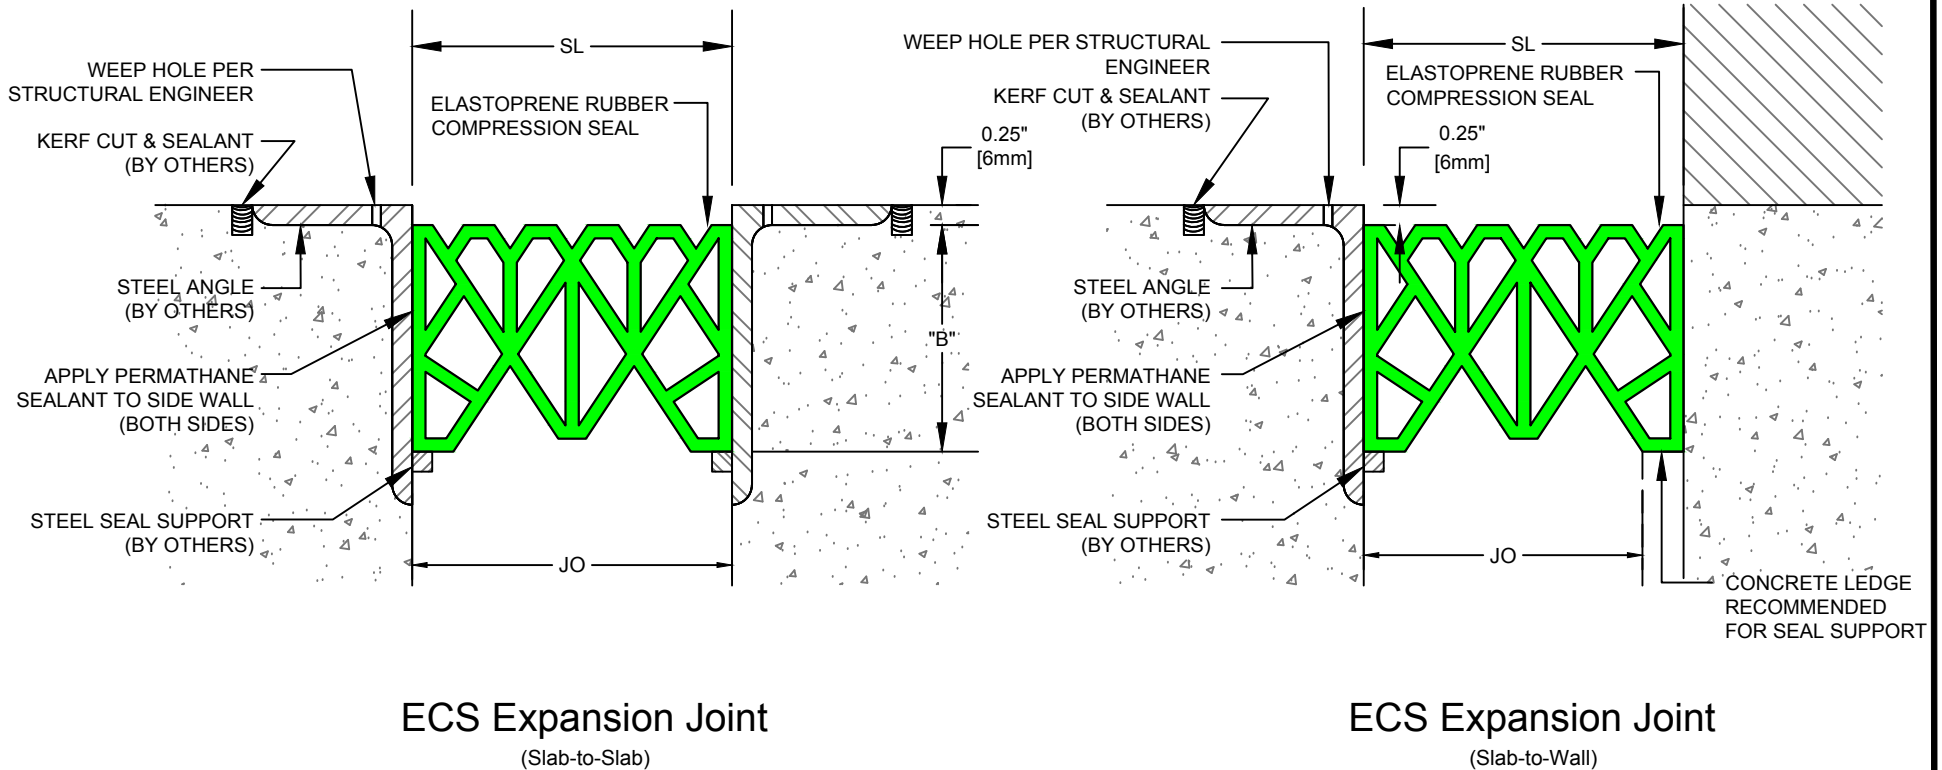

ECS Expansion Joint
(Slab-to-Slab)

ECS Expansion Joint
(Slab-to-Wall)



50 MM WAY
PENDERGRASS, GA. 30567
706-824-7500 PHONE
866-506-6929 TOLL FREE
706-824-7501 FAX

www.mm-usa.com

For Spec-Data, Install Guides and other data visit www.mm-usa.com.

RIGHTS OF DESIGN

All rights of design, detail, engineering and/or invention contained herein are the property of MM Systems Corporation and hereby reserved and are not to be reproduced or provided to any other party. MM Systems Corporation reserves the right to amend or withdraw any information contained herein without notice and will not be liable for any inaccuracy or ambiguity of said information.

**Elastoprene Compression Expansion Joint
ECS with Armored Angle Series**

Drawn by: DMW	Scale: NTS	Drawing Number: 30400-02
SHT. 1 OF 1	Issue Date: 02-24-2016	