
Model Number	Nominal (JO _N)				Thermal Movement (JO _T) Minimum Maximum			Seismic Movement (JOs) Minimum Maximum				Total (JO∆) Movement		Slide Plate Thickness (ST)		
SSD-C-400	4.00	102	6.875	175	2.00	51	6.00	152	1.33	34	6.00	152	4.67	119	0.375	10
SSD-C-500	5.00	127	7.875	200	2.50	64	7.50	191	1.67	42	7.50	191	5.83	148	0.375	10
SSD-C-600	6.00	152	8.875	225	3.00	76	9.00	229	2.00	51	9.00	229	7.00	178	0.375	10
SSD-C-700	7.00	178	9.875	251	3.50	89	10.50	267	2.33	59	10.50	267	8.17	208	0.375	10

Base Angle	System							
Size	Height (SH)							
3.5 x 1.75	3.00	76						
3.5 x 2	3.25	83						
3.5 x 2.25	3.5	89						
3.5 x 2.5	3.75	95						
3.5 x 2.75	4	102						
3.5 x 3	4.25	108						
3.5 x 3.25	4.5	114						
3.5 x 3.5	4.75	121						
3.5 x 3.75	5	127						
3.5 x 4	5.25	133						
3.5 x 4.25	5.5	140						
3.5 x 4.5	5.75	146						
35 x 4 75	6	152						

Dimension shown in inches (bold) and millimeters. JO = Joint Opening. SL = Sight Line. Color Options for rubber seals are Black or Special Order Gray. Safety Max.- Safety Margin Movement capacity accommodates concrete shrinkage, vertical deflection and unexpected movement. Waterproofing Membrane Compatibility - confirm with membrane manufacturer grade of rubber to be used on waterproofing splice flap.

Elevation Control Area - Surface areas two feet on each side of the expansion joint opening shall have identical elevations creating flush slab-to-slab transition. See drawing 40075-04 for SSD-800 through 1200.

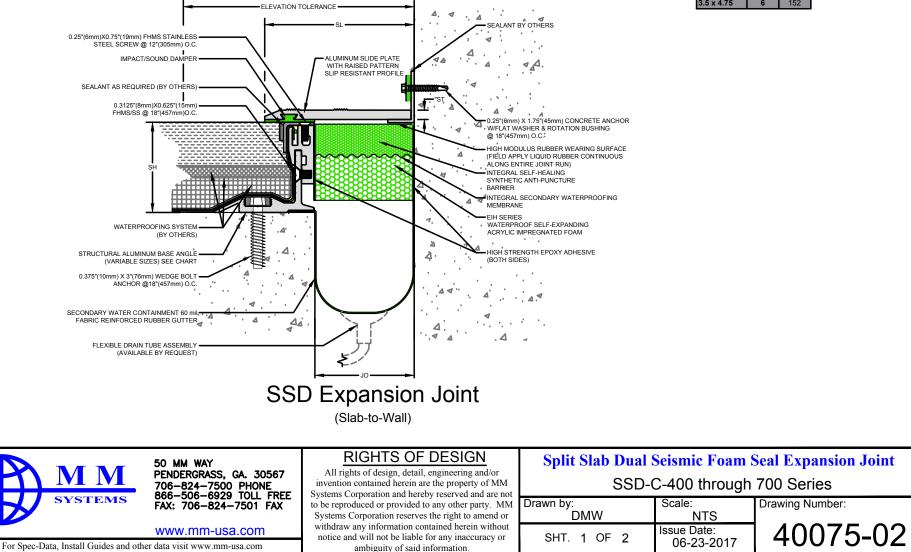

Model	(10.)		Nominal (SL∾)		Thermal Movement (JO _T)			Seismic Movement (JOs)				Total (JO _△)		Slide Plate		
Number					Minimum		Maximum		Minimum		Maximum		Movement		Thickness (ST)	
SSD-C-400	4.00	102	6.875	175	2.00	51	6.00	152	1.33	34	6.00	152	4.67	119	0.375	10
SSD-C-500	5.00	127	7.875	200	2.50	64	7.50	191	1.67	42	7.50	191	5.83	148	0.375	10
SSD-C-600	6.00	152	8.875	225	3.00	76	9.00	229	2.00	51	9.00	229	7.00	178	0.375	10
SSD-C-700	7.00	178	9.875	251	3.50	89	10.50	267	2.33	59	10.50	267	8.17	208	0.375	10

Base Angle

Size

3.5 x 1.75

3.5 x 2.25

3.5 x 2.5

3.5 x 2.75

3.5 x 3.25

3.5 x 3.5

3.5 x 3.75

3.5 x 4.25

3.5 x 4

3.5 x 3

3.5 x 2

System

Height (SH)

76

83

89

95

102

108

114

121

127

133

140

3.00

3.25

3.5

3.75

4

4.25

4.5

4.75

5

5.25

5.5

Dimension shown in inches (bold) and millimeters. JO = Joint Opening. SL = Sight Line. Color Options for rubber seals are Black or Special Order Gray. Safety Max.- Safety Margin Movement capacity accommodates concrete shrinkage, vertical deflection and unexpected movement.

Waterproofing Membrane Compatibility - confirm with membrane manufacturer grade of rubber to be used on waterproofing splice flap.

Elevation Control Area - Surface areas two feet on each side of the expansion joint opening shall have identical elevations creating flush slab-to-slab transition. See drawing 40075-04 for SSD-800 through 1200.

