
Model	Nominal		Nominal		Thermal Movement (JO _T)				Seismic Movement (JOs)				Total (JO∆)	
Number	(JO _N)		(SL _N)		Minimum		Maximum		Minimum		Maximum		Movement	
SSF-C-200LP	1.50	38	4.00	102	0.75	19	2.50	64	0.75	19	3.25	83	2.50	64
SSF-C-300LP	2.00	57	4.75	121	1.00	25	3.50	89	1.00	25	4.25	108	3.25	83
SSF-C-400LP	3.00	76	5.50	140	1.50	38	4.50	114	1.50	38	5.50	140	4.00	102
SSF-C-500LP	4.00	102	6.50	165	1.50	38	5.50	140	1.50	38	6.50	165	5.00	127
SSF-C-600LP	5.00	127	7.50	191	3.00	76	6.00	152	3.00	76	9.00	229	6.00	152

Dimension shown in inches (bold) and millimeters. JO = Joint Opening. SL = Sight Line.

Waterproofing Membrane Compatibility - confirm with membrane manufacturer grade of rubber to be used on waterproofing splice flap.

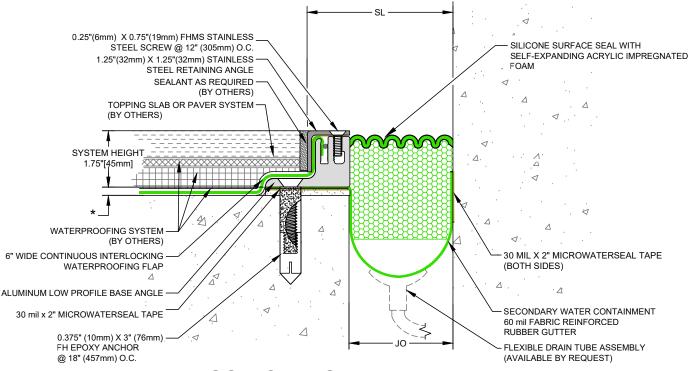

SSF-C-LP Series Expansion Joint

(Slab-to-Wall)

★ NOTE: LEVELING BED (BY OTHERS) ADJUSTED IN FIELD AS NECESSARY TO ACHIEVE PROPER ELEVATION



50 MM WAY PENDERGRASS, GA. 30567 706-824-7500 PHONE 800-241-3460 TOLL FREE 706-824-7501 FAX

www.mm-usa.com

RIGHTS OF DESIGN

All rights of design, detail, engineering and/or invention contained herein are the property of MM Systems Corporation and hereby reserved and are not to be reproduced or provided to any other party. MM Systems Corporation reserves the right to amend or withdraw any information contained herein without notice and will not be liable for any inaccuracy or ambiguity of said information.

Split-Slab Silicone Foam Expansion Joint SSF-C Low Profile Series

Drawn by: Scale: DMW NTS Issue Date: SHT. 1 OF 1 02-15-2019

Drawing Number:

41050-04