
Model	Nominal		Nominal		Thermal Movement (JO <sub>T</sub> )				Seismic Movement (JOs)				Total (JO∆)		Seal Depth	
Number	(IO <sup>N</sup> )		(SL <sub>N</sub> )		Minimum		Maximum		Minimum		Maximum		Movement		(SD)	
VCS-175	1.000	25	1.000	25	0.50	13	1.50	38	0.500	13	1.50	38	1.00	25	1.50	38
VCS-225	1.375	35	1.375	35	0.75	19	2.00	51	1.375	35	2.00	51	1.25	32	2.00	51
VCS-300	2.000	51	2.000	51	1.25	32	2.75	70	1.250	32	2.75	70	1.50	38	2.50	64

Dimension shown in inches (bold) and millimeters. JO = Joint Opening. SL = Sight Line. Color Options for rubber seals are Black (standard) and Fog Gray or Special Order Prairier Beige.



VCS Expansion Joint

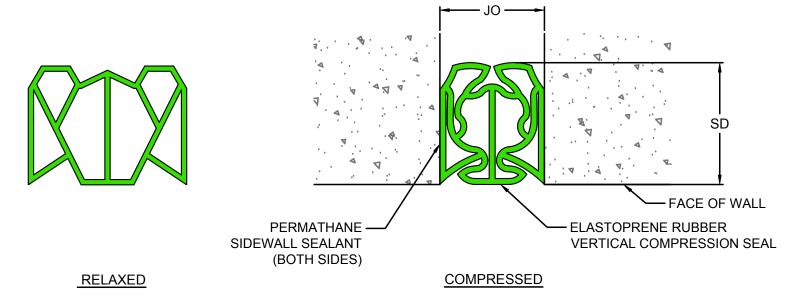

50 MM WAY PENDERGRASS, GA. 30567 706-824-7500 PHONE 800-241-3460 TOLL FREE 706-824-7501 FAX

www.mm-usa.com

For Spec-Data, Install Guides, and other data visit www.mm-usa.com.

## RIGHTS OF DESIGN

All rights of design, detail, engineering and/or invention contained herein are the property of MM Systems Corporation and hereby reserved and are not to be reproduced or provided to any other party. MM Systems Corporation reserves the right to amend or withdraw any information contained herein without notice and will not be liable for any inaccuracy or ambiguity of said information.

## Vertical Compression Seal Expansion Joint VCS Series

1	Drawn by:	Scale:									
	DMW	NTS									
	SHT. 1 OF 1	Issue Date: 04-06-2014									

Drawing Number:

31400-01