


IMPORTANT LIFE SAFETY NOTE
 4-1/2" MINIMUM FACE OF SLAB (AS SHOWN) REQUIRED FOR OPTIONAL FIRE RATING TO BE AVAILABLE IN ACCORDANCE TO IBC TABLE 721.2.2.1 "MINIMUM SLAB THICKNESS" ARCHITECT / CONTRACTOR MUST VERIFY PRIOR TO FABRICATION.

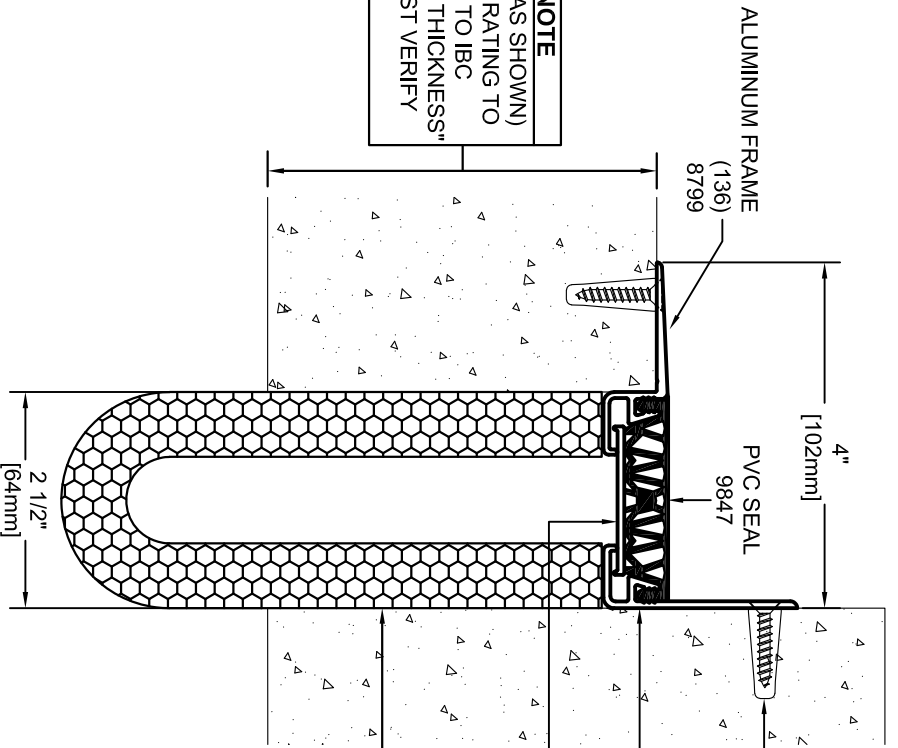

#10 X 1/4" FHSM/SS &
 #10 - 12 X 1/4" ANCHOR
 PLASTIC INSERT
 @ 24" O.C. [610mm]
 9351 & 9357
 ALUMINUM FRAME
 (915)
 8797
 SUPPORT PLATE
 (195)
 8774

IMPORTANT LIFE SAFETY PRODUCT NOTE
 PF-2018F-SC-3-1-1/2 (OPTIONAL) TO ACHIEVE RATING, 2-HOUR FIRE BARRIER MUST BE INSTALLED IN 2-HOUR RATED SLAB, MINIMUM 4-1/2" JT. FACE. BARRIERS MUST BE INSTALLED IN STRICT ACCORDANCE WITH TYPICAL FLOOR FIRE BARRIER INSTALLATION INSTRUCTIONS PROVIDED IN THIS SUBMITTAL.

* CONTRACT FACTORY FOR OTHER STYLES OF FIRE BARRIER

Model	Nominal "JT"	Seismic Min.	Thermal Min.	Thermal Max.	Seismic Max.	Total Movement	Mat. Code
FSSE-250	2.50"	1.875"	2.25"	2.75"	2.9375"	1.0625"	EJFS1605
FSSE-25 W/ PF2018F-SC-3-1 1/2	2.50"	1.875"	2.25"	2.75"	2.9375"	1.0625"	

ARCHITECT/CONTRACTOR NOTE:
 ALL SUBASSEMBLY COMPONENTS TO BE PROVIDED IN 10'-0" OR 20'-0" STOCK LENGTHS UNLESS OTHERWISE NOTED. THE SPECIFIC SYSTEMS DICTATE THE LENGTHS PROVIDED.

Representative: _____ Customer: _____

Project: _____

Location: _____

Project Number: _____

Approved by: _____ Date: _____

SEAL NOTE: SPECIFY SEAL COLOR

STANDARD COLORS:


CARBON (BLACK) PRAIRIE (BEIGE)

FOG (GRAY) LUNAR (WHITE)

CUSTOM COLOR AVAILABLE IN MINIMUM QUANTITIES 100 LF. CONTACT MM FOR PRICING & AVAILABILITY.

RIGHTS OF DESIGN

All rights of design, detail, engineering and/or invention contained herein are the property of MM Systems Corporation and hereby reserved and are not to be reproduced or provided to any other party. MM Systems Corporation reserves the right to amend or withdraw any information contained herein without notice and will not be liable for any inaccuracy or ambiguity of said information.



MM
 MM SYSTEMS

50 MM WAY
 PENDERGRASS, GA. 30567
 PHONE: 706-824-7500
 800-241-3460
 FAX: 706-824-7501

www.mmsystemscorp.com

For Spec-Data, Installation Guides, or movement requirements, contact MMSC

FSSE-250

Model: _____
 Drawn by: _____ Scale: NTS
 SHT. OF . Issue Date: _____

Drawing Number: **EJFS1605**